


MLT6SC

Light Tower Parts Manual

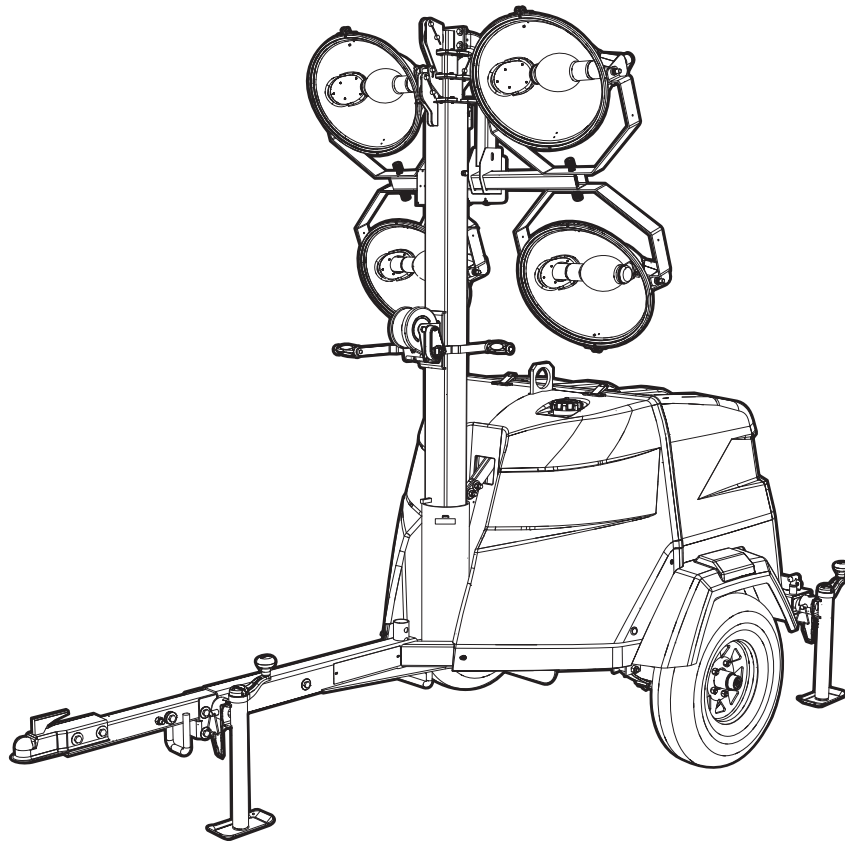

02449

MODEL NUMBER: _____

SERIAL NUMBER: _____

DATE PURCHASED: _____

SAVE THIS MANUAL FOR FUTURE REFERENCE

 WARNING

CANCER AND REPRODUCTIVE HARM

www.P65Warnings.ca.gov.

(000393a)

 WARNING

Breathing diesel engine exhaust exposes you to chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

- Always start and operate the engine in a well-ventilated area.
- If in an enclosed area, vent the exhaust to the outside.
- Do not modify or tamper with the exhaust system.
- Do not idle the engine except as necessary.

For more information go to

www.P65Warnings.ca.gov/diesel.

(000394)

Introduction

This parts manual was prepared based on the information available at the time of publication and is subject to change without notice. Generac Mobile Products reserves the right to change parts at any time. To check whether a revised parts manual is available, contact Generac Mobile Products.

DO NOT MODIFY or use this equipment for any application other than which it was designed for. To keep your equipment fully operational, it is suggested you maintain a stock of commonly used maintenance or service parts. A recommended spare parts list can be found in the back of this manual. To order service parts, please go to **www.generacmobileproducts.com** or call Generac Mobile Products.



⚠ WARNING

Consult Manual. Read and understand manual completely before using product. Failure to completely understand manual and product could result in death or serious injury. (000100a)

⚠ WARNING

Environmental Hazard. Always recycle batteries at an official recycling center in accordance with all local laws and regulations. Failure to do so could result in environmental damage, death, or serious injury. (000228)

GENERAC MOBILE PRODUCTS LLC

215 Power Drive • Berlin, WI 54923 U.S.A.

Phone: 920-361-4442

FAX: 920-361-4416

Toll Free: 1-800-926-9768

www.generacmobileproducts.com

For technical or parts QUESTIONS, contact Generac Mobile Products Technical Service at 1-800-926-9768.

Engine Make: _____

Engine Serial Number: _____

Engine Model Number: _____

This Page Intentionally Left Blank

Table of Contents

Introduction	iii
Parts Manual Instructions	1
Unit Decals - Front, Rear and Top.....	2
Unit Decals - Left and Right Sides.....	4
Unit Decals - Inside Unit	6
Mast, Junction Box and Lights to Unit	8
Light Assembly 1000-1050W.....	10
Light Assembly - 1100W.....	12
Mast Junction Box Assembly.....	14
Mast Assembly	16
Mast Assembly - Bottom Post - Manual Winch	18
Mast Assembly - Bottom Post - Electric Winch	20
Enclosure Assembly (1 of 2).....	22
Enclosure Assembly (2 of 2).....	24
Control Box Assembly	26
Control Box Assembly - Powerzone Option (1 of 2).....	28
Control Box Assembly - Powerzone Option (2 of 2).....	30
Cooling System Assembly.....	32
Engine Assembly (1 of 2)	34
Engine Assembly (2 of 2)	36
Generator Assembly.....	38
Components to Trailer Assembly	40
Trailer Assembly.....	42
Recommended Spare Parts - Engine	44
Recommended Spare Parts - Electrical	46
Recommended Spare Parts - Misc.....	48


This Page Intentionally Left Blank

Parts Manual Instructions

Product illustrations are only representations. Products supplied may vary from the illustrations in this parts manual. Parts not shown in the illustration are indicated by a double dash (--) in the item column.


Please be prepared to provide the following information when ordering replacement parts: model number, serial number (on unit serial tag), part number, purchase order number (if applicable), shipping address, shipping method.

Refer to the illustration below to locate the unit ID tag and Vehicle Identification Number (VIN) tag on the unit. Important information, such as the unit serial number, model number, VIN and tire loading information are found on these tags. Record the information from these tags so it is available if the tags are lost or damaged. When ordering parts or requesting assistance, you may be asked to provide this information.

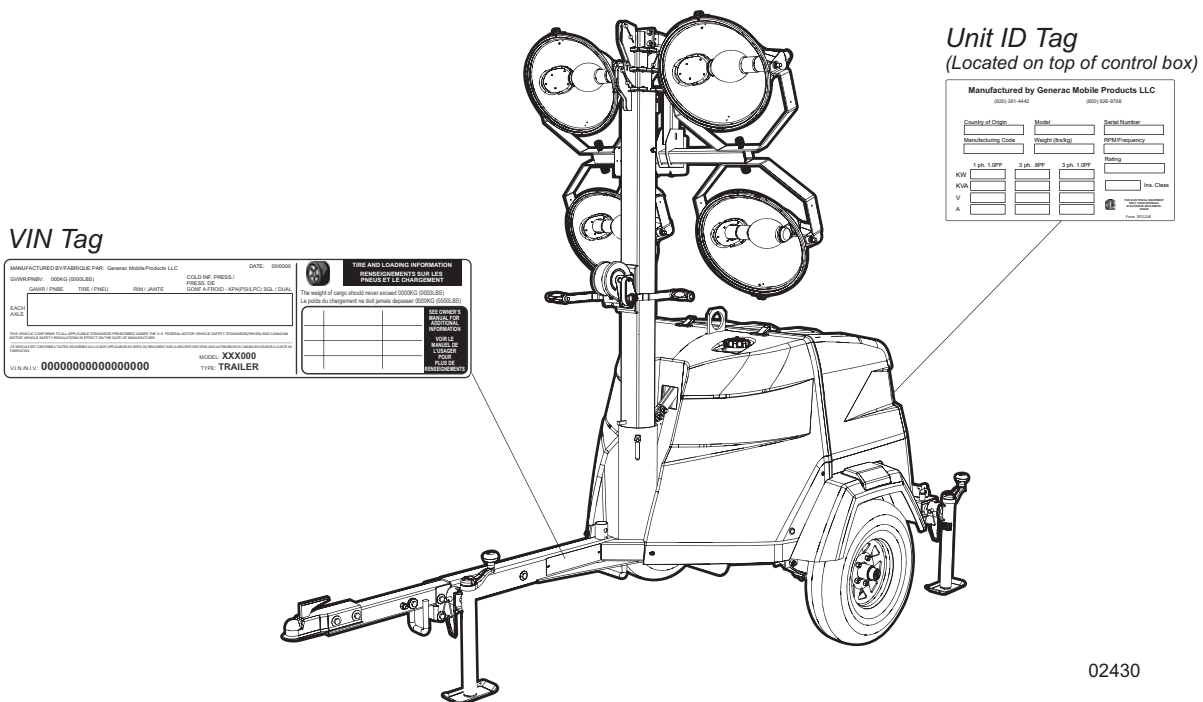

02430

UNIT DECALS - FRONT, REAR AND TOP

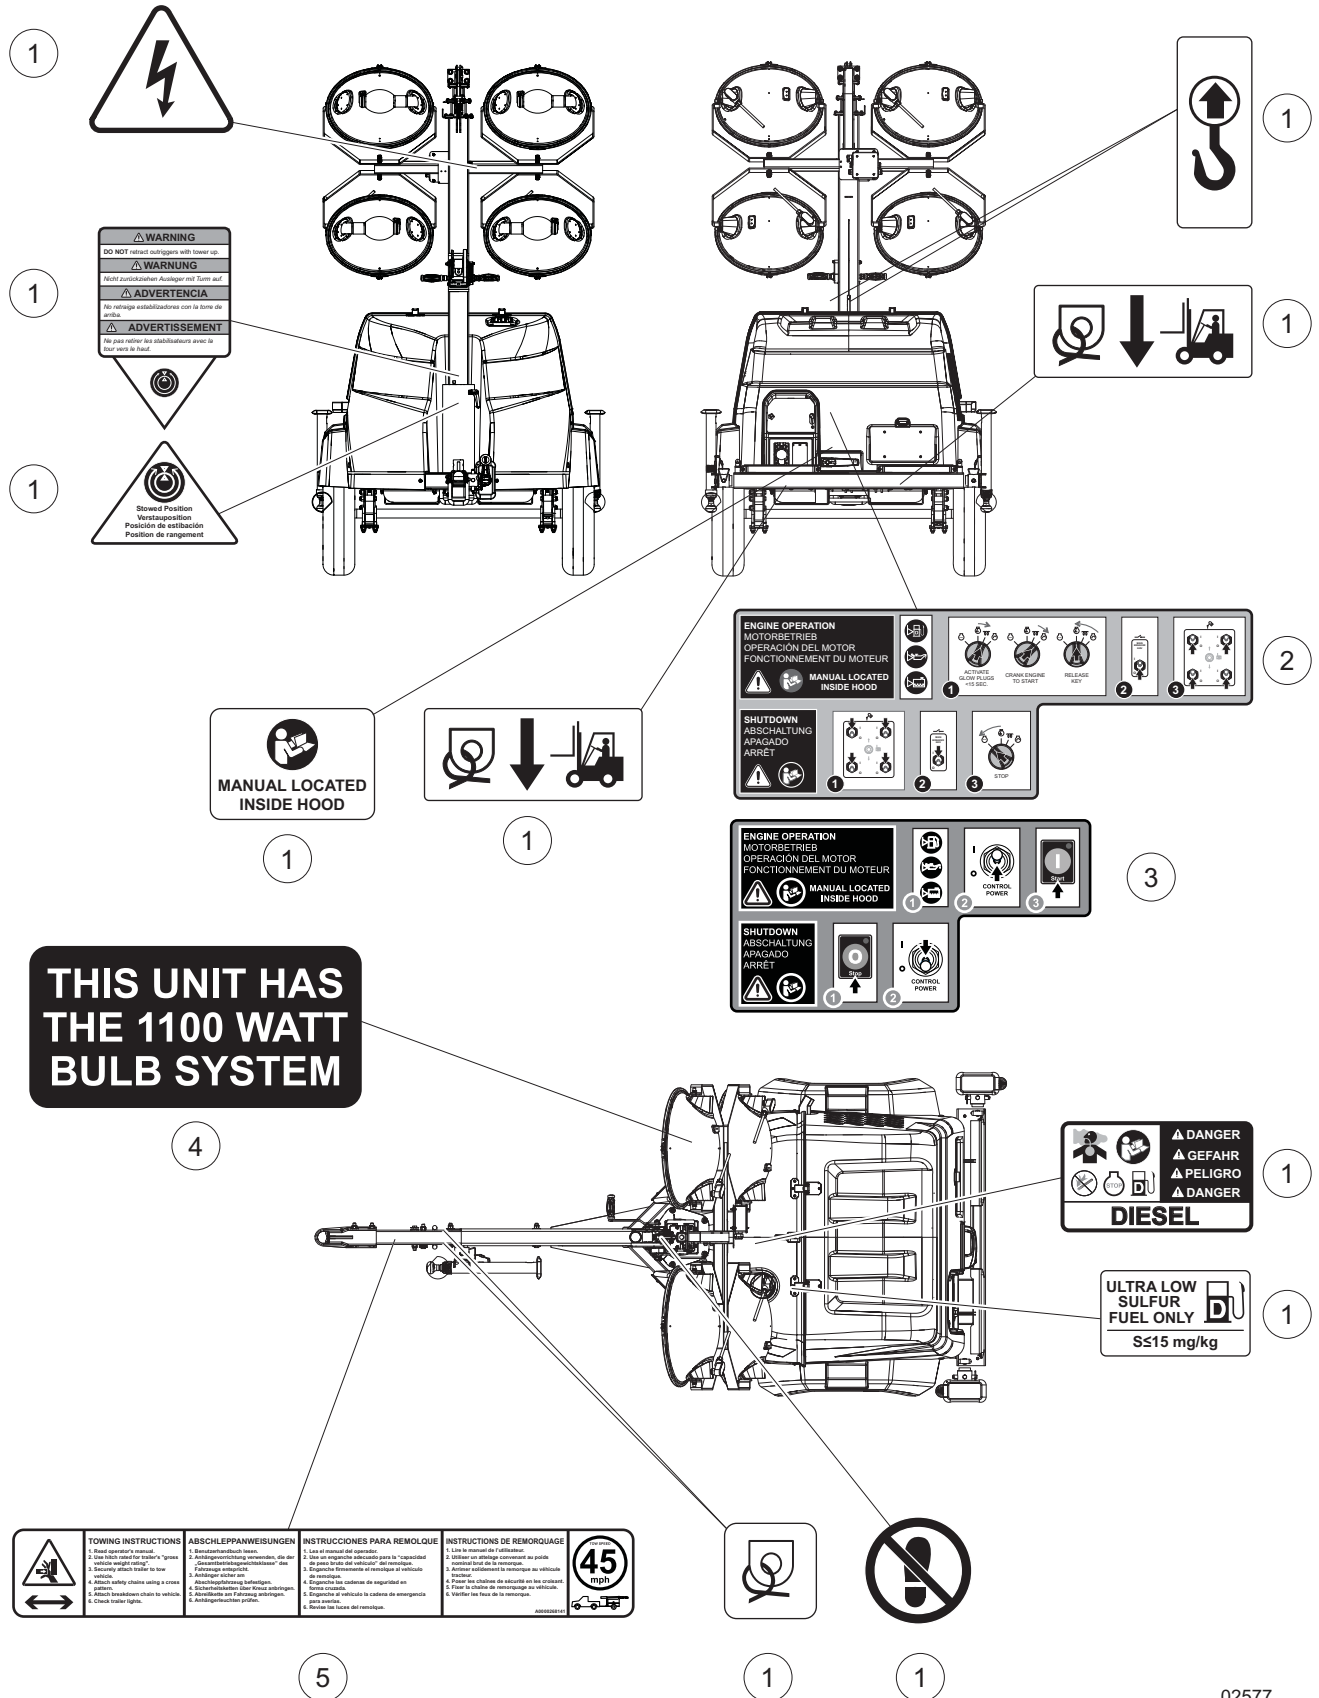



02577

UNIT DECALS - FRONT, REAR AND TOP



Item	Part No.	Qty	Description	Notes
1	17979	1	Decal, safety MLT6	
2	17980	1	Decal, operation MLT6/ (manual)	
3	76916	1	Decal, operation PZ	Powerzone only
4	10000030392	4	Decal, 1100W bulb system	one each lamp
--	10000031782	2	Cable tie, with decal 10000030392	one on main harness one on light harness

UNIT DECALS - LEFT AND RIGHT SIDES

1

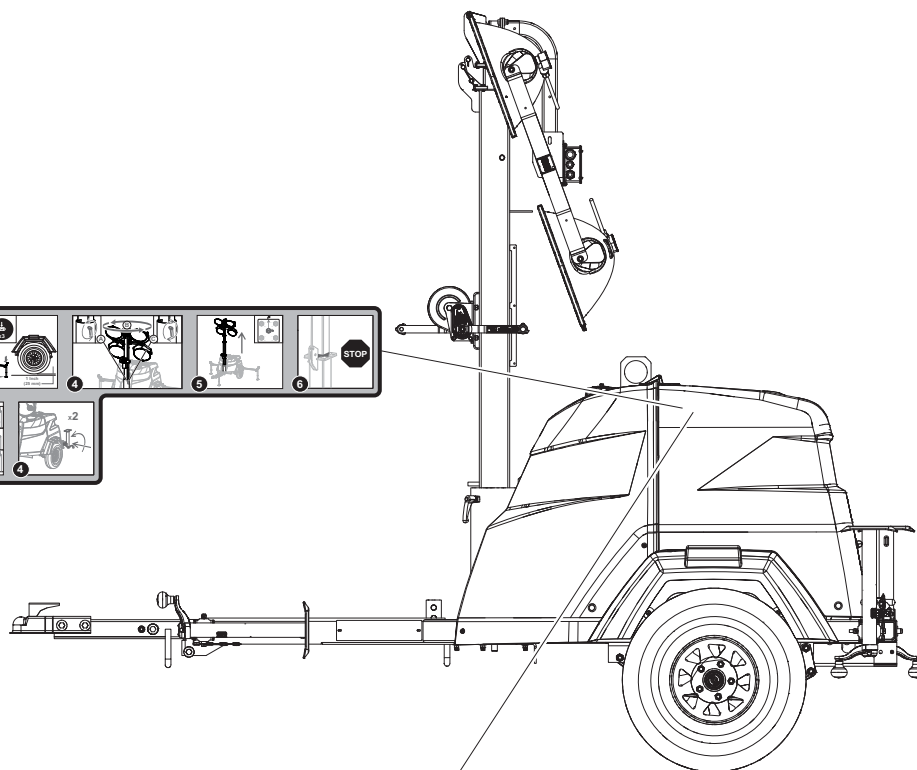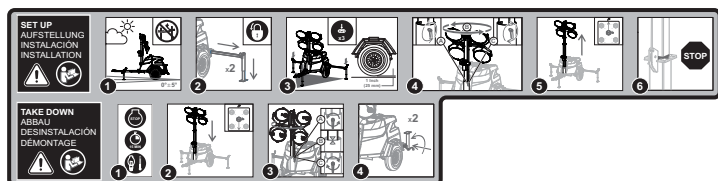

2

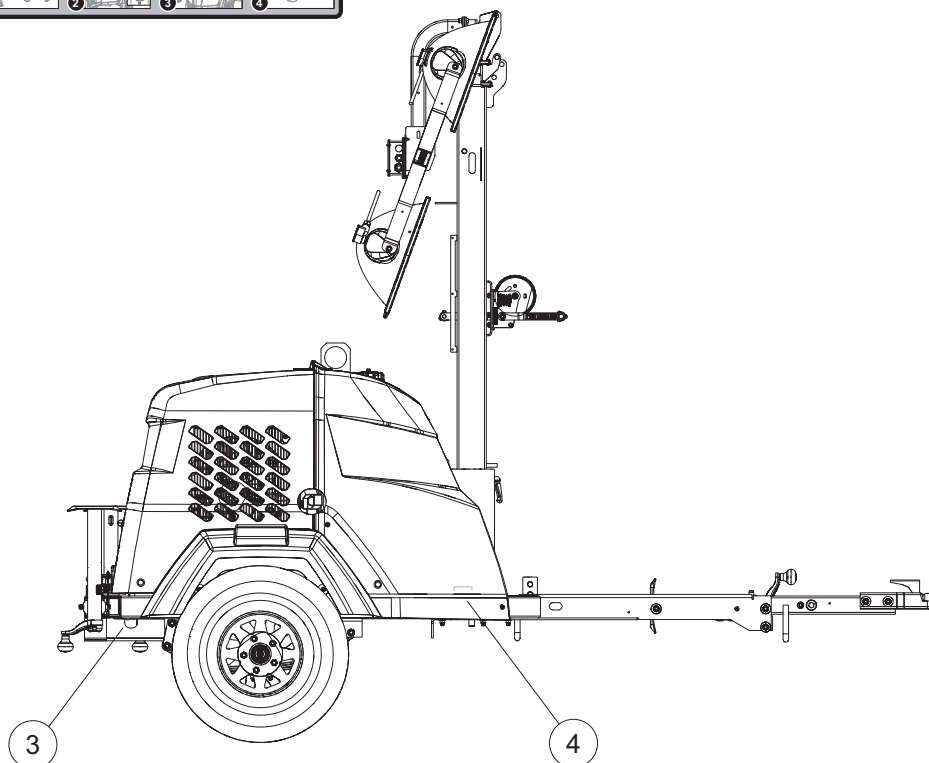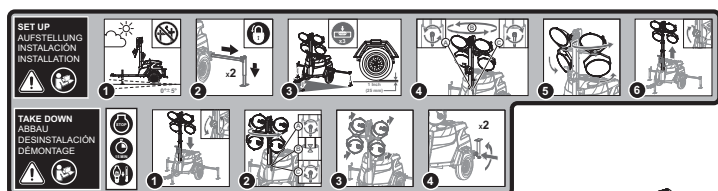

02432

UNIT DECALS - LEFT AND RIGHT SIDES

Item	Part No.	Qty	Description	Notes
1	70096	1	Decal, operation MLT6/8S (electric)	
2	17980	1	Decal, operation MLT6/8S (manual)	
3	72149	1	Reflector, red (4.25 inch x .75 inch)	Set of two
4	72150	1	Reflector, yellow (4.25 inch x .75 inch)	Set of two


6



UNIT DECALS - INSIDE UNIT

Item	Part No.	Qty	Description	Notes
1	17979	1	Decal, safety MLT6/8S	
2	12142	1	Decal, ground	
3	17986	1	Decal, control panel MLT 6SK-M	
--	70196	1	Decal, control panel - Powerzone	Powerzone only
4	72132	1	Reflector, rear 2.0 x 2.0 - red	Set of two

MAST, JUNCTION BOX AND LIGHTS TO UNIT

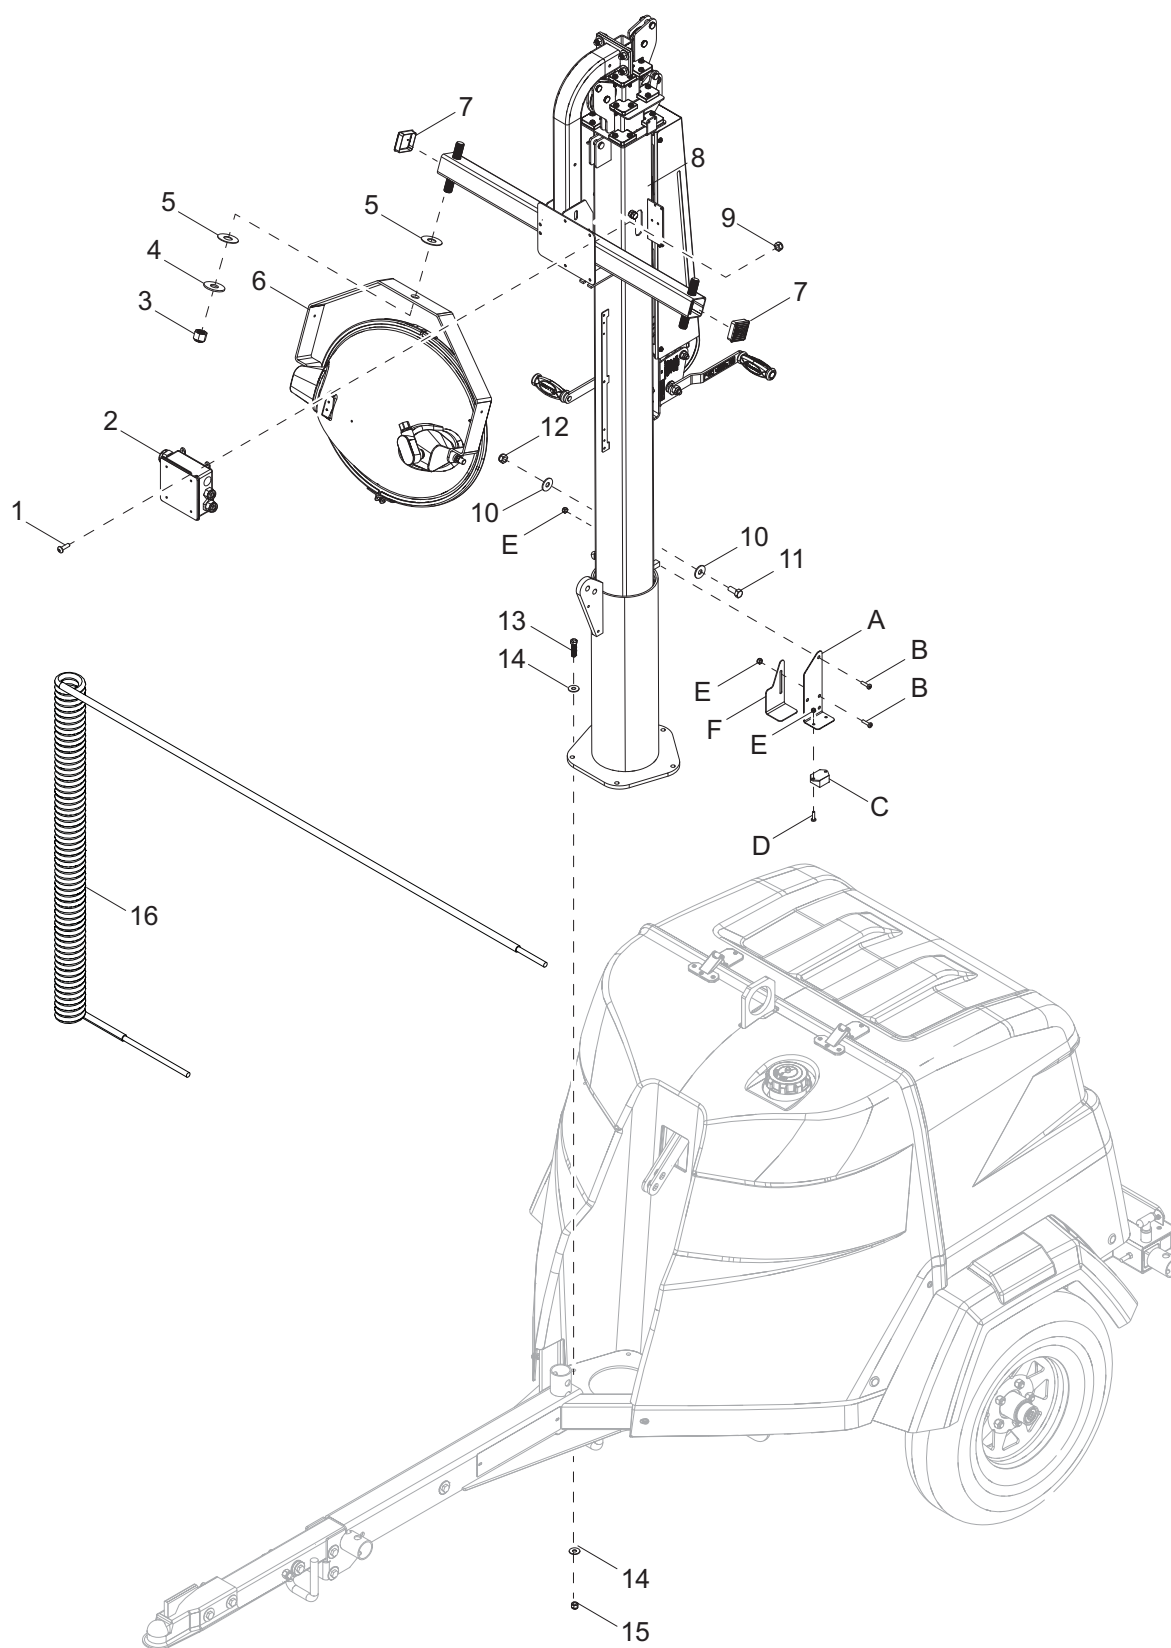


02434

MAST, JUNCTION BOX AND LIGHTS TO UNIT

Item	Part No.	Qty	Description	Notes
1	60062	4	Screw, 10-32 x .750 pan Phillips, G2	
2	31250SRV	1	Assembly, mast box	
3	60584	4	Nut, .750-10 nylock, G5	
4	60247	4	Washer, .750 flat 2.020/.130	
5	63357	8	Washer, .750 flat 2.0/.062 - plastic	
6	A0000117617	4	Assembly, oval light fixture 1100W MH	
7	10000023259	2	Plug, 2.0 square x 14 ga. wall tube, plastic - black	
8	10000018877	1	Assembly, mast - manual winch, NAP	
9	60415	4	Nut, 10-32 nylock, SS	
10	60309	4	Washer, .500 flat 1.060/.090	
11	60484	2	Screw, .500-13 x 2.0 standard hex, G5	
12	62221	2	Nut, .500-13 nylock, G5	
13	60139	5	Screw, .375-16 x 1.50 hex, G5	
14	60386	10	Washer, .375 flat .993/.064	
15	60358	5	Nut, .375-16 nylock, G5	
16	39650	1	Coil cord with connector	
<i>Night Watchman: If equipped</i>				
A	70208B	1	Bracket, night watchman	
B	60488	4	Screw, 8-32 x .750 pan Phillips, G2	
C	68763	1	Assembly, night watchman	
D	62054	2	Screw, 8-32 x .500 pan Phillips 18-8, SS	
E	60270	8	Nut, 8-32 nylock	
F	56610B	1	Cover, dusk to dawn sensor	

1000-1050 WATT ASSEMBLY

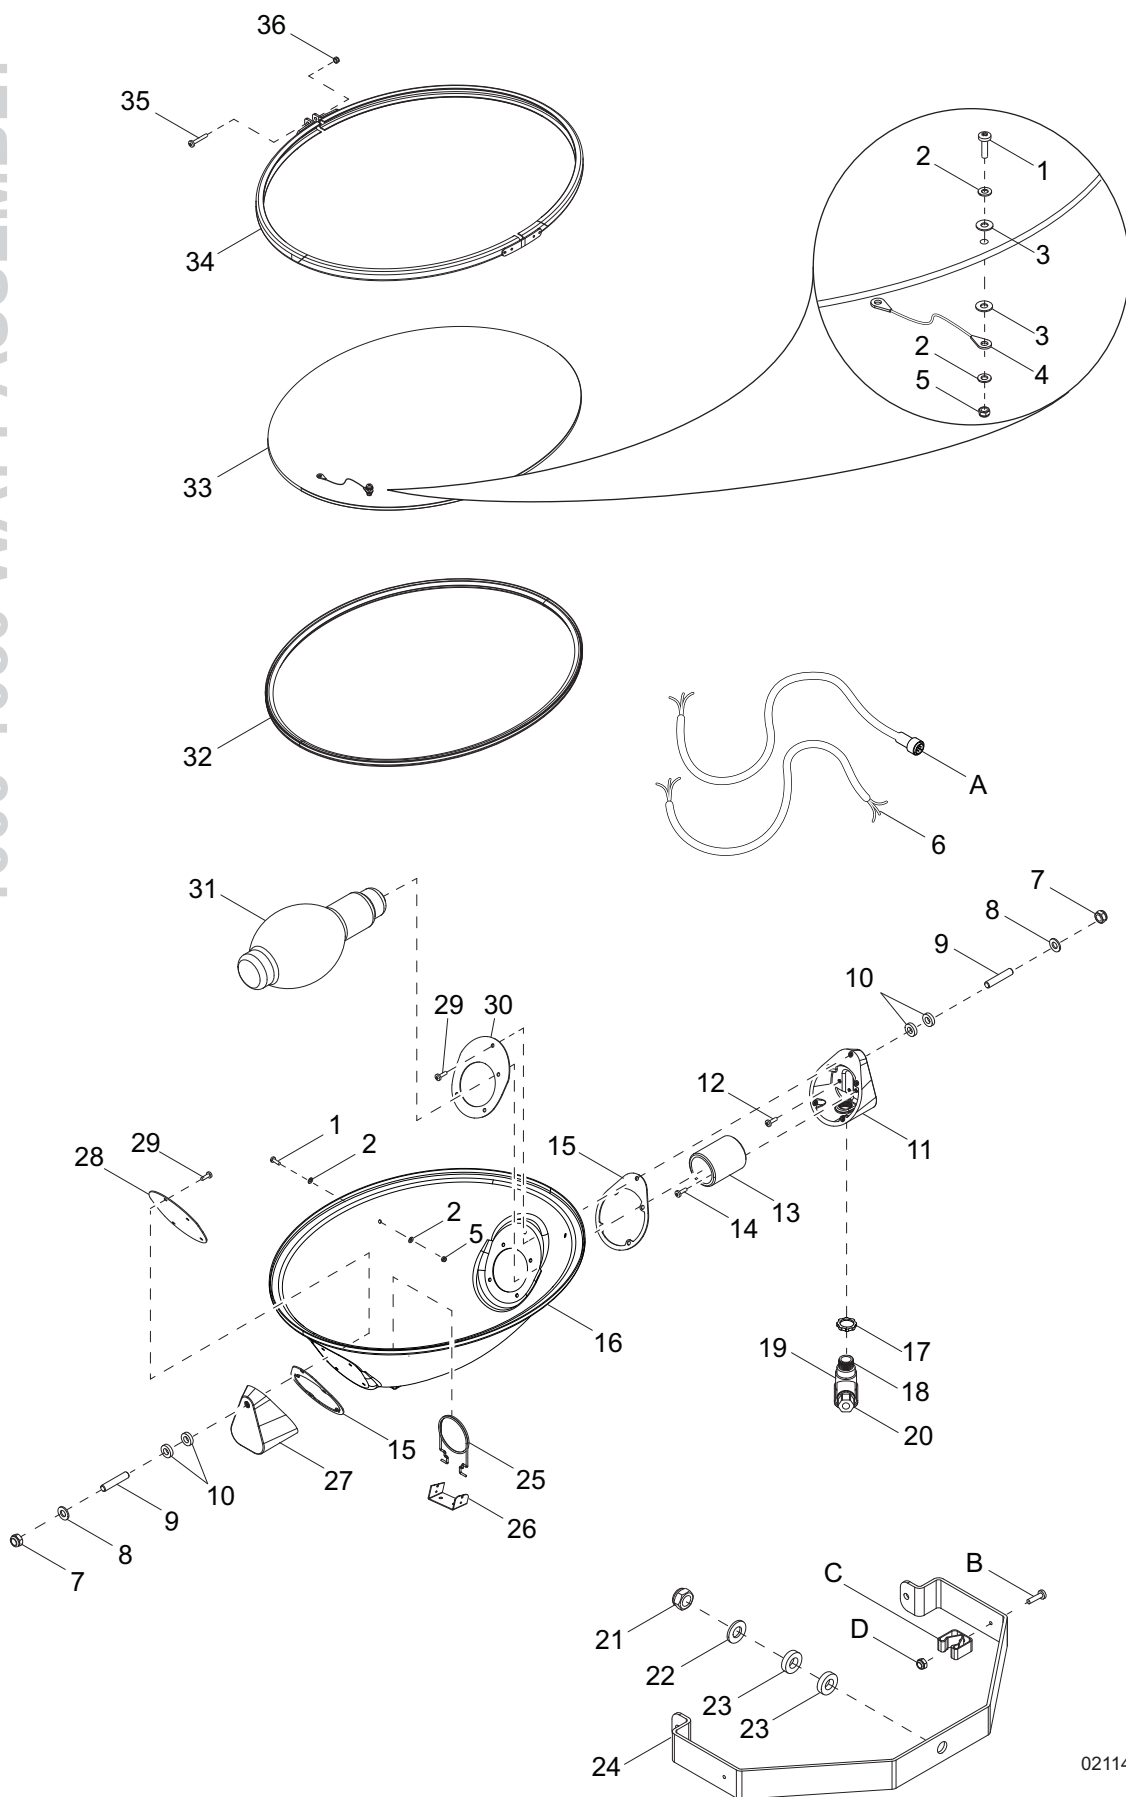

02114


LIGHT ASSEMBLY 1000-1050W

Item	Part No.	Qty	Description	Notes
1	13399	2	Screw, 8-32 x .500 pan Phillips - SS	
2	60067	2	Washer, #10 flat .435/.060, SS	
3	13372	2	Washer, #4 nylon	
4	13370	1	Assembly, tether	
5	60051	4	Nut, M4 - .70 nylock, G8.8	
6	13438	1	Cord, power - hard wired	
7	62221	2	Nut, .500-13 nylock, G5	
8	60309	2	Washer, .500 flat .413/.787 - SS	
9	13392	2	Stud, trunnion	
10	13390	4	Washer, .500 nylon	
11	13375	1	Support, housing/trunnion with cord	
12	13393	1	Screw, M5 x 12 Phillips - green	
13	13381	1	Socket, bulb	
14	60694	2	Screw, 8-32 x .750 pan Phillips, SS	
15	13378	2	Gasket, silicone	
16	13366	1	Housing	
17	15861	1	Nut, special, .500NPT lock	
18	13386	1	Fitting, nipple - .500	
19	13387	1	Connector, weather tight	
20	15864	1	Strain relief, .500NPT watertight, .270/.464 ID	
21	60584	1	Nut, .750-10 nylock, G5	
22	60247	1	Washer, .750 flat 2.020/.130	
23	63357	2	Washer, .750 flat 2.0/.062 plastic	
24	13368	1	Trunnion	
25	13892	1	Support, bulb	
26	10000022390	1	Bracket, light holder	
27	13374	1	Support, housing/trunnion w/out cord	
28	13377	1	Bracket, end plate	
29	13388	10	Screw, M5 x 12 slotted hex w/flange	
30	13376	1	Bracket, socket end	
31	10000022381	1	Bulb, metal halide 1100W (replaces 10000008611)	
32	10000022305	1	Gasket, lens	
33	10000022371	1	Lens, glass	
34	13367	1	Assembly, aluminum ring	
35	60167	1	Screw, M5-.80 x 35 pan Phillips, G4.8	
36	60038	2	Nut, M5 - .80 nylock, G6	
--	10000008620	4	Assembly, light fixture 1050W non-quick disc. - oval	Items 1-35

Quick Disconnect: (if equipped)

A	13383	1	Cord, power - quick disconnect
B	60398	1	Screw, 10-32 x .500 pan Phillips, SS
C	19041	1	Clip, spring holder
D	60061	1	Nut, 10-32 nylock, G5
E	10000008612	1	Assembly, light fixture/QD cord clip

1100 WATT ASSEMBLY

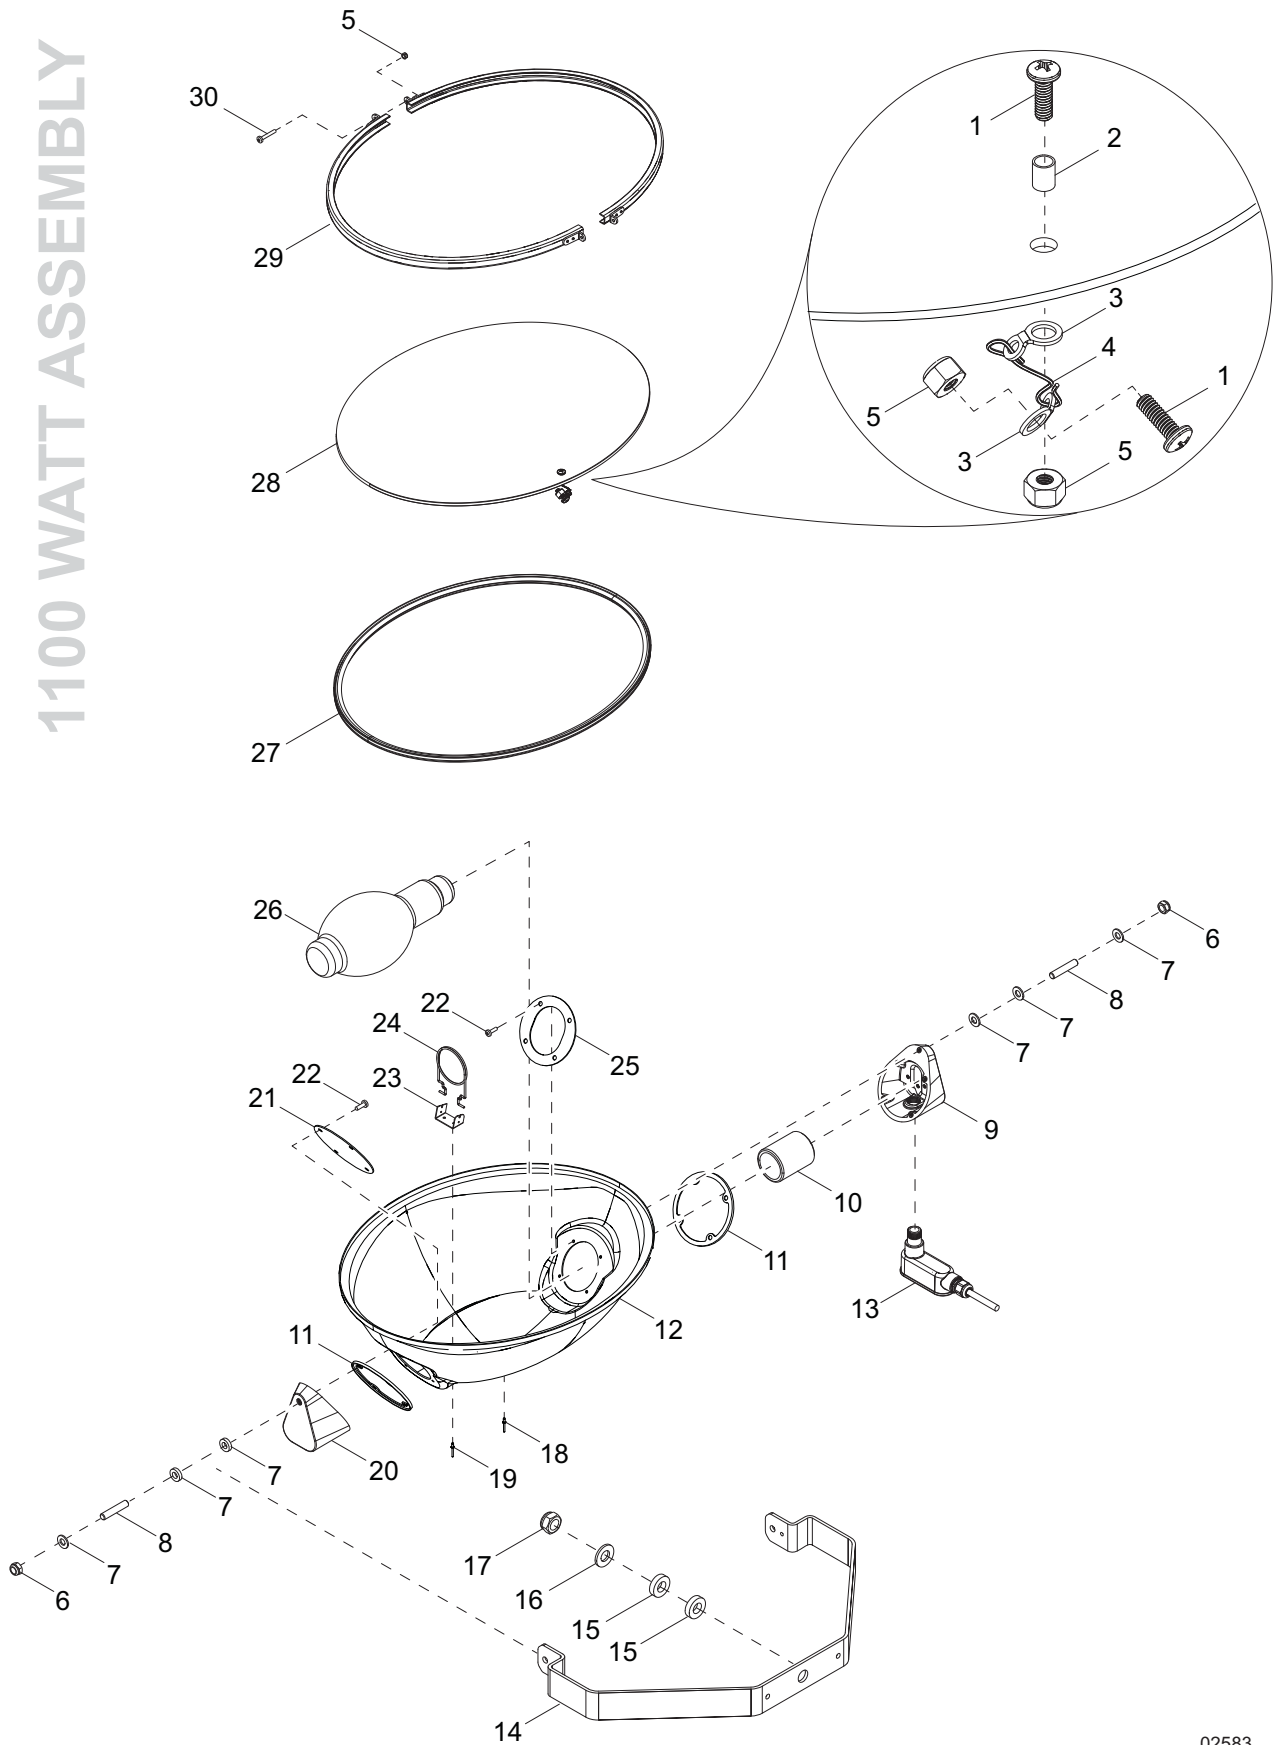


02583

LIGHT ASSEMBLY - 1100W

Item	Part No.	Qty	Description	Notes
1	13399	2	Screw, M4 x 18 pan Phillips	
2	60067	2	Washer, #10 flat .435/.060, SS	
3	13372	2	Washer, #4 nylon	
4	13370	1	Assembly, tether	
5	60051	1	Nut, M4 - .70 nylock, G8.8	
6	60358	2	Nut, .375-16 hex nylock, G5	
7	60027	6	Washer, M10 flat	
8	13392	2	Stud, .375-24 x 2.00	
9	10000022356	1	Support, with cord	
10	13381	1	Socket, HID light	
11	10000022355	2	Gasket, silicone	
12	10000022370	1	Housing	
13	10000022392	1	Connector, weather tight	
14	10000022410	1	Bracket, trunnion HID light	
15	63357	2	Washer, .750 flat 2.0/.062 plastic	
16	60247	1	Washer, .750 flat 2.020/.130	
17	60584	1	Nut, .750-10 nylock, G5	
18	10000022383	2	Rivet, .134 diameter x .09 to .125 grip - SS	
19	10000022420	2	Rivet, .094 diameter x .09 to .240 grip - SS	
20	10000022354	1	Support, without cord	
21	10000022329	1	Bracket, non socket end	
22	13388	8	Screw, M5 x 12 slotted hex w/flange	
23	10000022390	1	Bracket, light holder	
24	13892	1	Support, bulb	
25	10000022357	1	Bracket, socket end	
26	10000022381	1	Bulb, metal halide 1100W	
27	10000022305	1	Gasket, lens	
28	10000022371	1	Lens, glass	
29	13367	2	Bracket, lens HSG secure	
30	60167	2	Screw, 8-32 x 1.500 pan Phillips - SS	
--	A0000117617	4	Assembly, oval light fixture 1100W MH	

MAST JUNCTION BOX ASSEMBLY

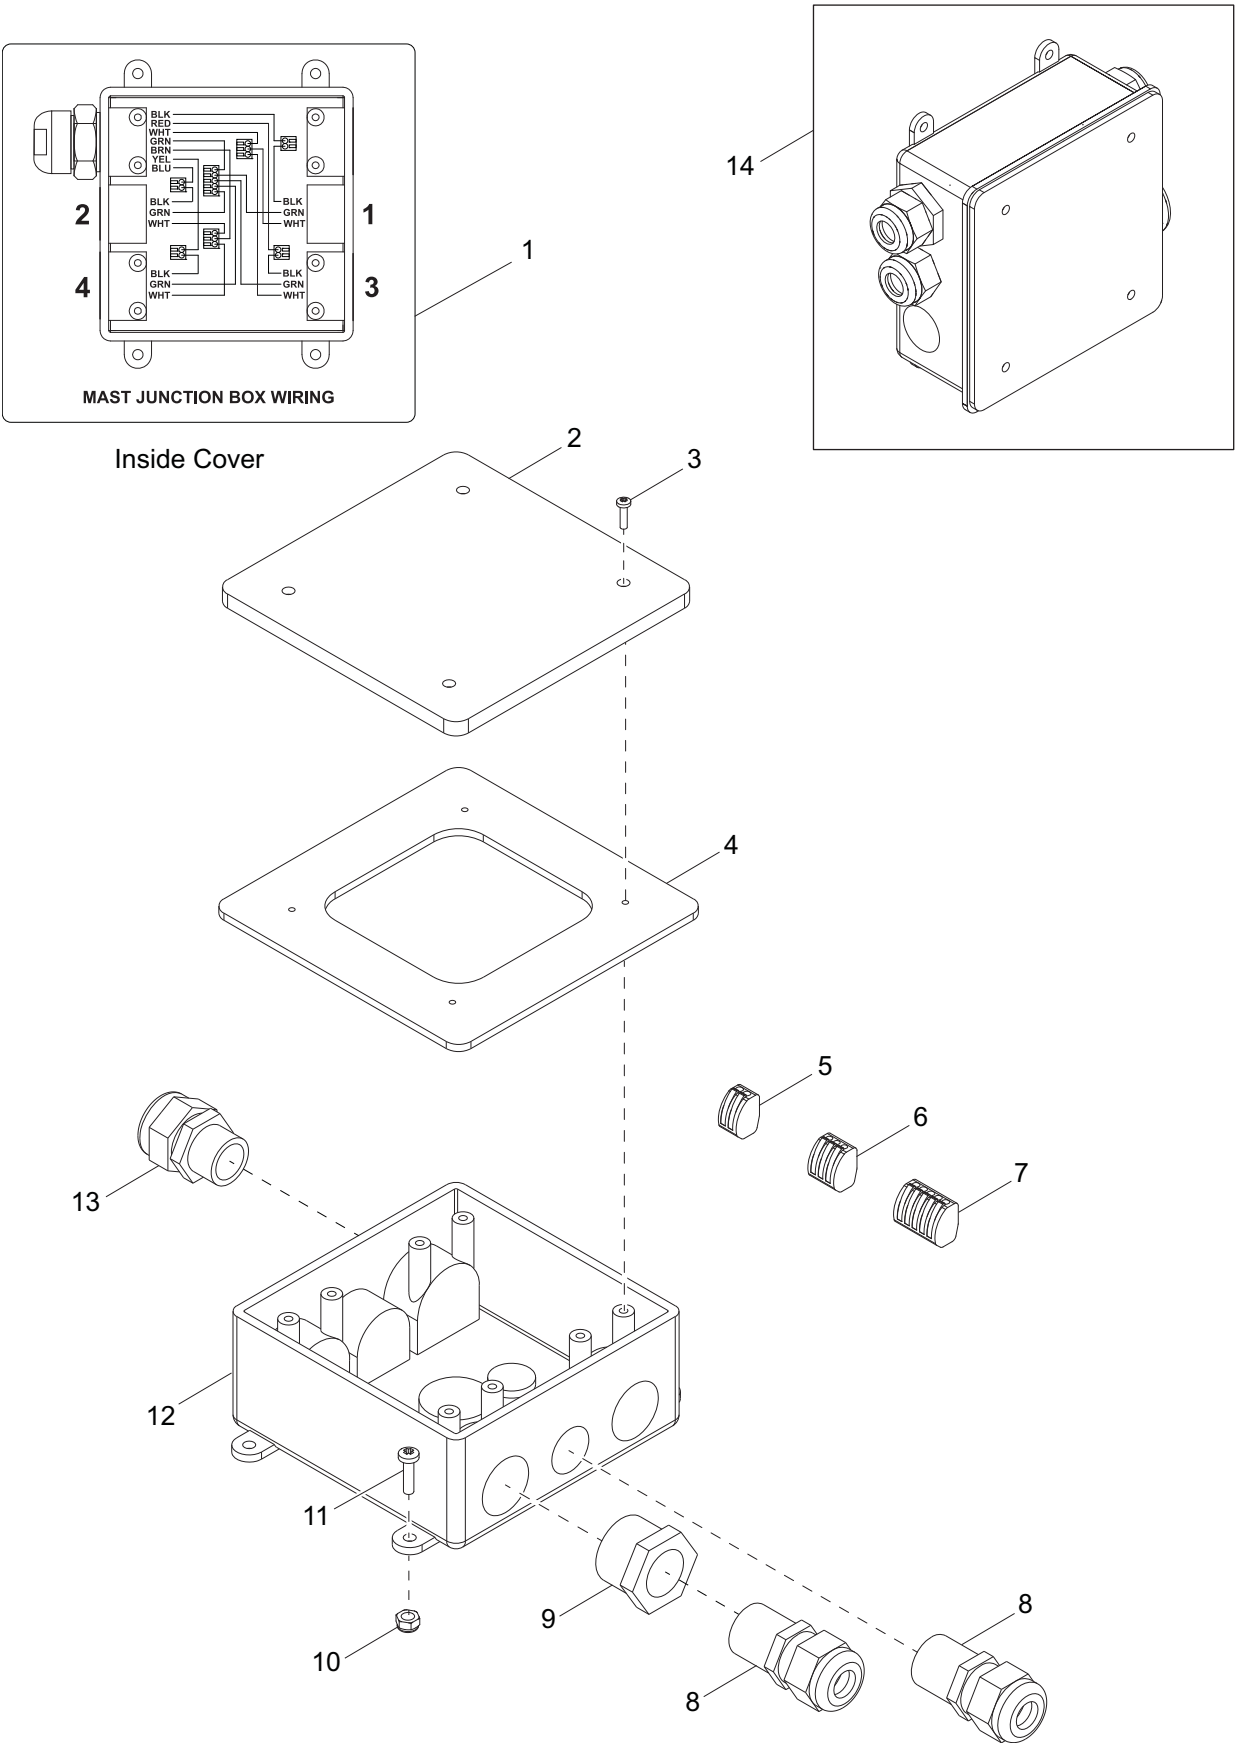


02132

MAST JUNCTION BOX ASSEMBLY

Item	Part No.	Qty	Description	Notes
1	37215	1	Decal, mast junction box wiring	
2	12109	1	Cover, box, 2-gang plastic	
3	60424	4	Screw, 6-32x.750 pan Phillips, G2	
4	13749SRV	1	Gasket, junction box - HFI 281000	
5	66100	4	Connector, 2 position.	
6	66101	2	Connector, 3 position.	
7	66102	1	Connector, 5 position.	
8	60755	2	Fitting, strt .750MNPT x .500FNPT, nylon	
9	15864	4	Strain relief, .500NPT watertight	
10	60415	4	Nut, 10-32 nylock, SS	
11	60062	4	Screw, 10-32x.750 pan Phillips, G2	
12	12094	1	Box, junction	
13	14656	1	Strain relief, .750NPT watertight	
14	31250SRV	1	Assembly, junction box	

MAST ASSEMBLY

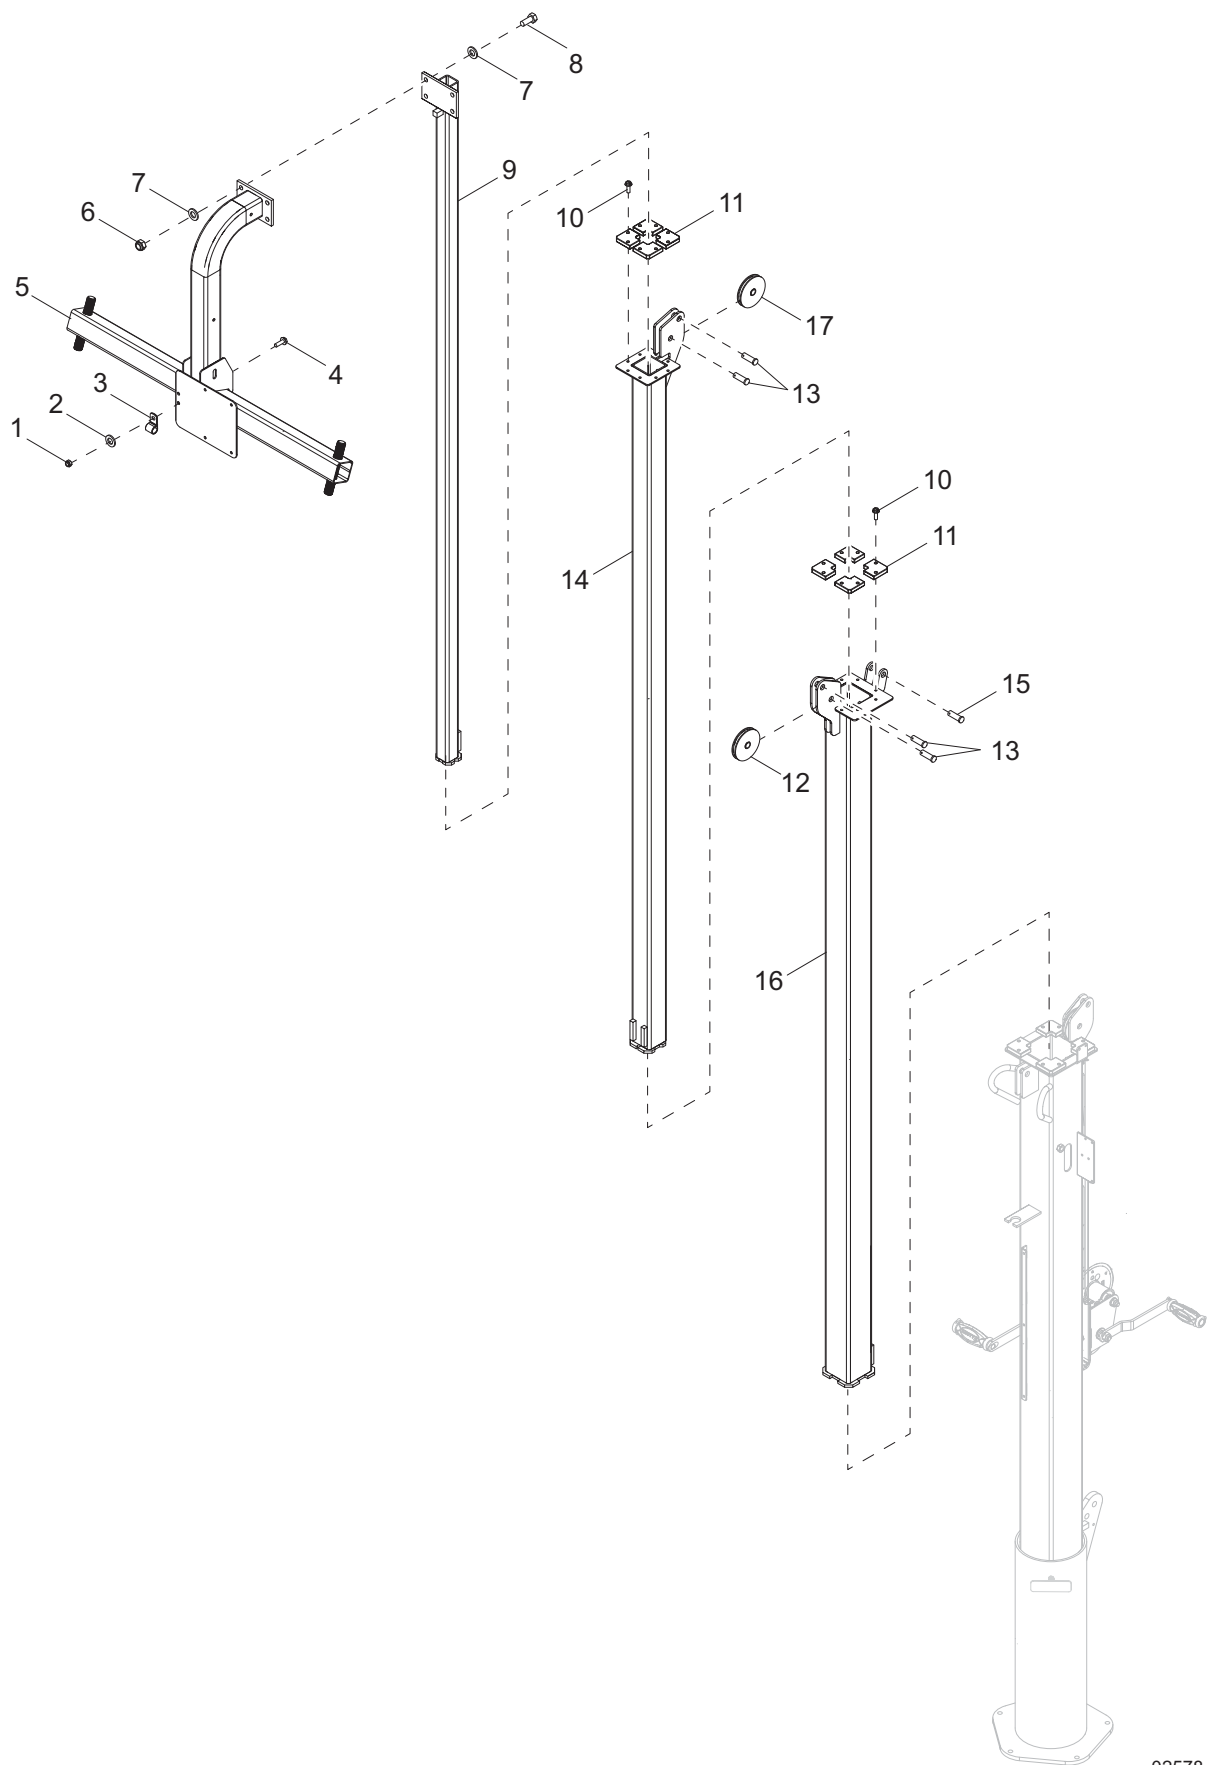


02578

MAST ASSEMBLY

Item	Part No.	Qty	Description	Notes
1	60144	1	Nut, .250-20 nylock, G5	
2	60243	1	Washer, .250 flat .735/.060	
3	16143	1	Clamp, tubing .500	
4	60107	1	Screw, .250-20 x .750 serrated flange hex, G5	
5	43201B	1	Weldment, mast, crossbar	
6	60358	4	Nut, .375-16 nylock, G5	
7	60386	8	Washer, .375 flat .993/.064	
8	60352	4	Screw, .375-16 x 1.250 hex, G5	
9	31264B	1	Weldment, mast - 1.50	
10	63358	16	Screw, .250-20 x .625 hex wash hd	
11	31225	8	Guide	
12	33736	1	Assembly, pulley - vertical mast	
13	63325	4	Pin, clevis .500 diameter x 1.063 UL	
14	31261B	1	Weldment, mast - 2.25	
15	35655	1	Pin, clevis .500 diameter x 1.750 ZP	
16	37465B	1	Weldment, mast - 3.0	
17	14262	1	Sheave, 3.00	
--	31247	1	Cable, .188 x 144 w/ ball swedge	winch cable
--	31248	2	Cable, .188 x 79.75 w/ball swedge	middle cable
--	31277	1	Cable, .188 x 78.0 w/ball swedge	top cable

MAST ASSEMBLY - BOTTOM POST - MANUAL WINCH

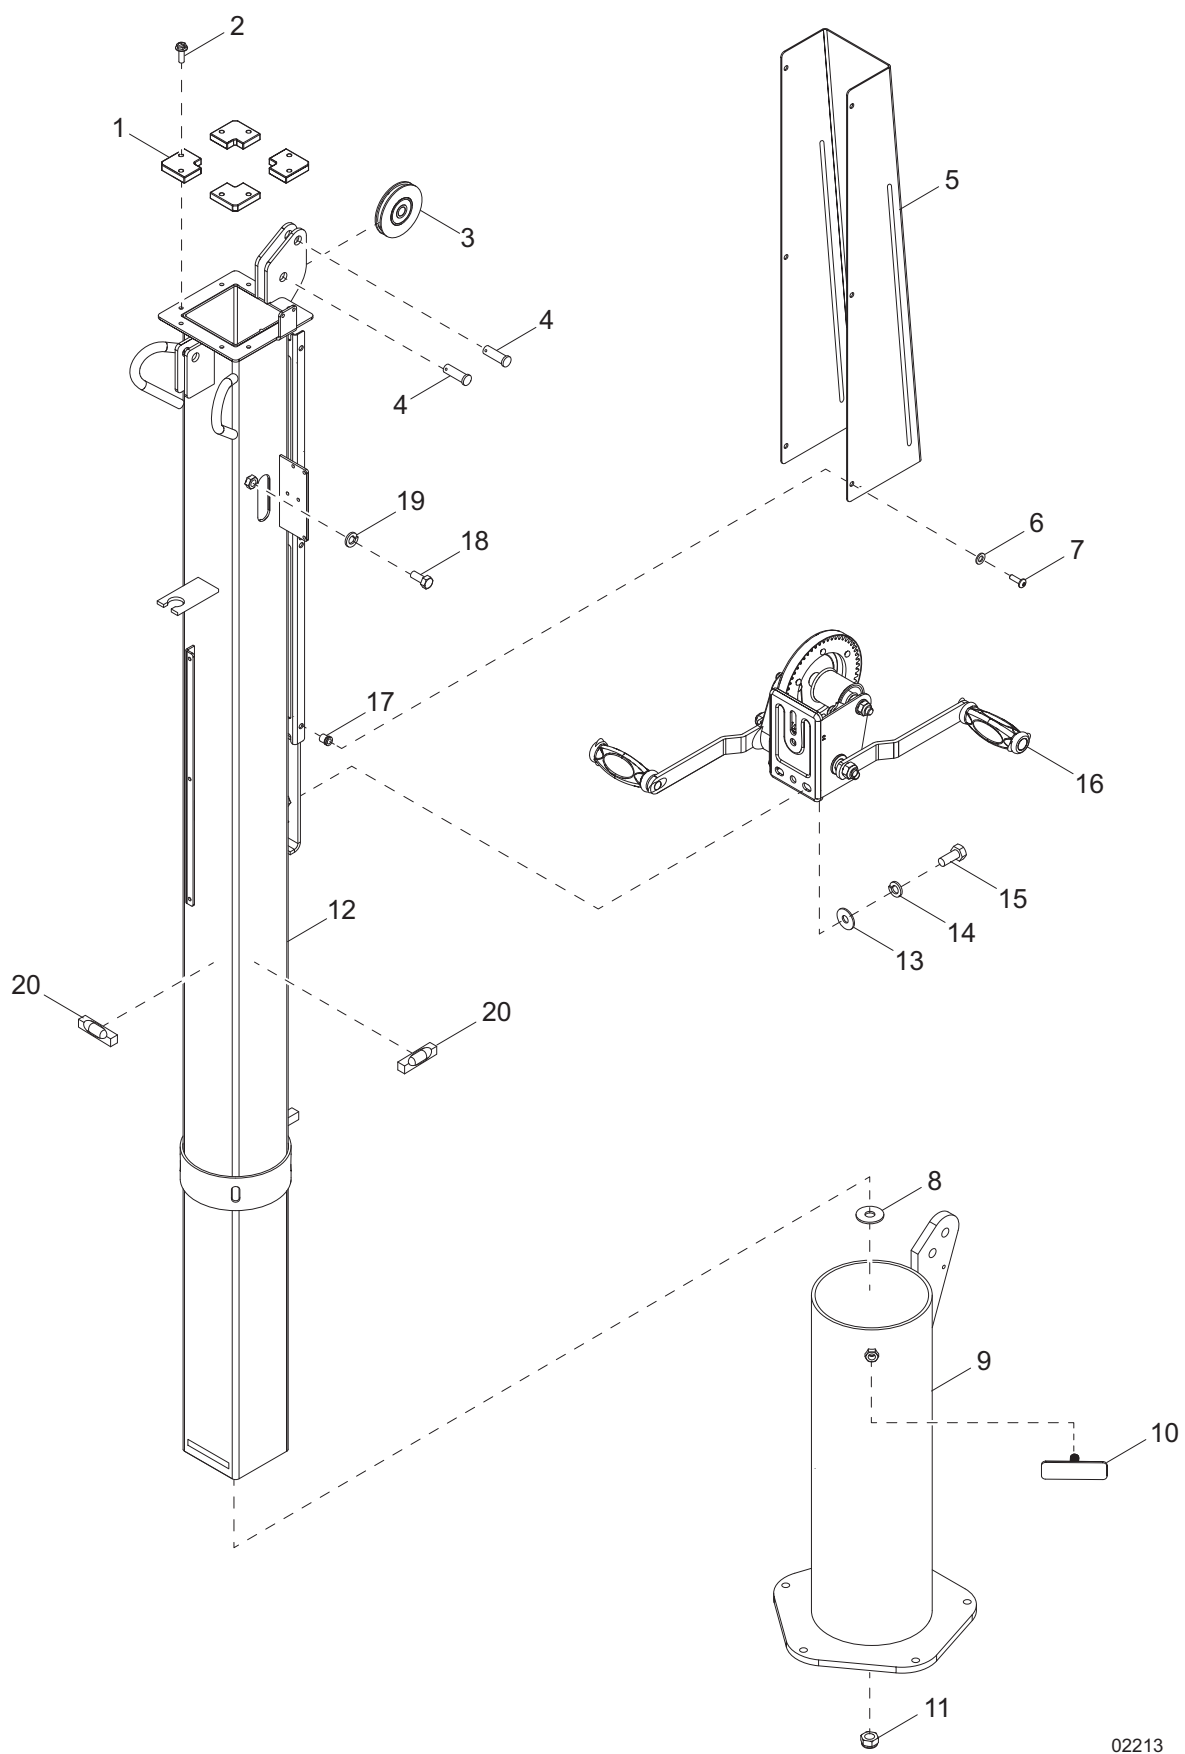


02213

MAST ASSEMBLY - BOTTOM POST - MANUAL WINCH

Item	Part No.	Qty	Description	Notes
1	31225	4	Guide	
2	63358	8	Screw, .250-20 x .625 hex washer head	
3	33736	1	Assembly, pulley vertical mast	
4	63325	2	Pin, clevis .500 diameter x 1.063 UL	
5	72116B	1	Guard, cable	
6	60067	6	Washer, #10 flat .435/.060 - SS	
7	60398	6	Screw, 10-32 x .500 pan Phillips - SS	
8	60247	1	Washer, .750 flat 2.020/.130	
9	31218B	1	Weldment, mast rotation tube	
10	10000018317	1	Weldment, T-handle	
11	60584	1	Nut, .750-10 nylock, G5	
12	73158B	1	Weldment, mast 4.0 in	
13	60386	3	Washer, .375 flat .993/.064	
14	60206	3	Washer, .375 split lock - hardened	
15	60205	3	Screw, .375-16 x 1.0 hex, G5	
16	72127	1	Winch, manual - 1500 lb, dual handle	
17	32922	6	Insert, threaded 10-32 splined, .020-.130 grip	
18	62269	2	Screw, .375-16 x .75 hex, SS - red	
19	60703	2	Washer, .375 split lock, SS	
20	A0000395310	2	Level	

MAST ASSEMBLY - BOTTOM POST - ELECTRIC WINCH

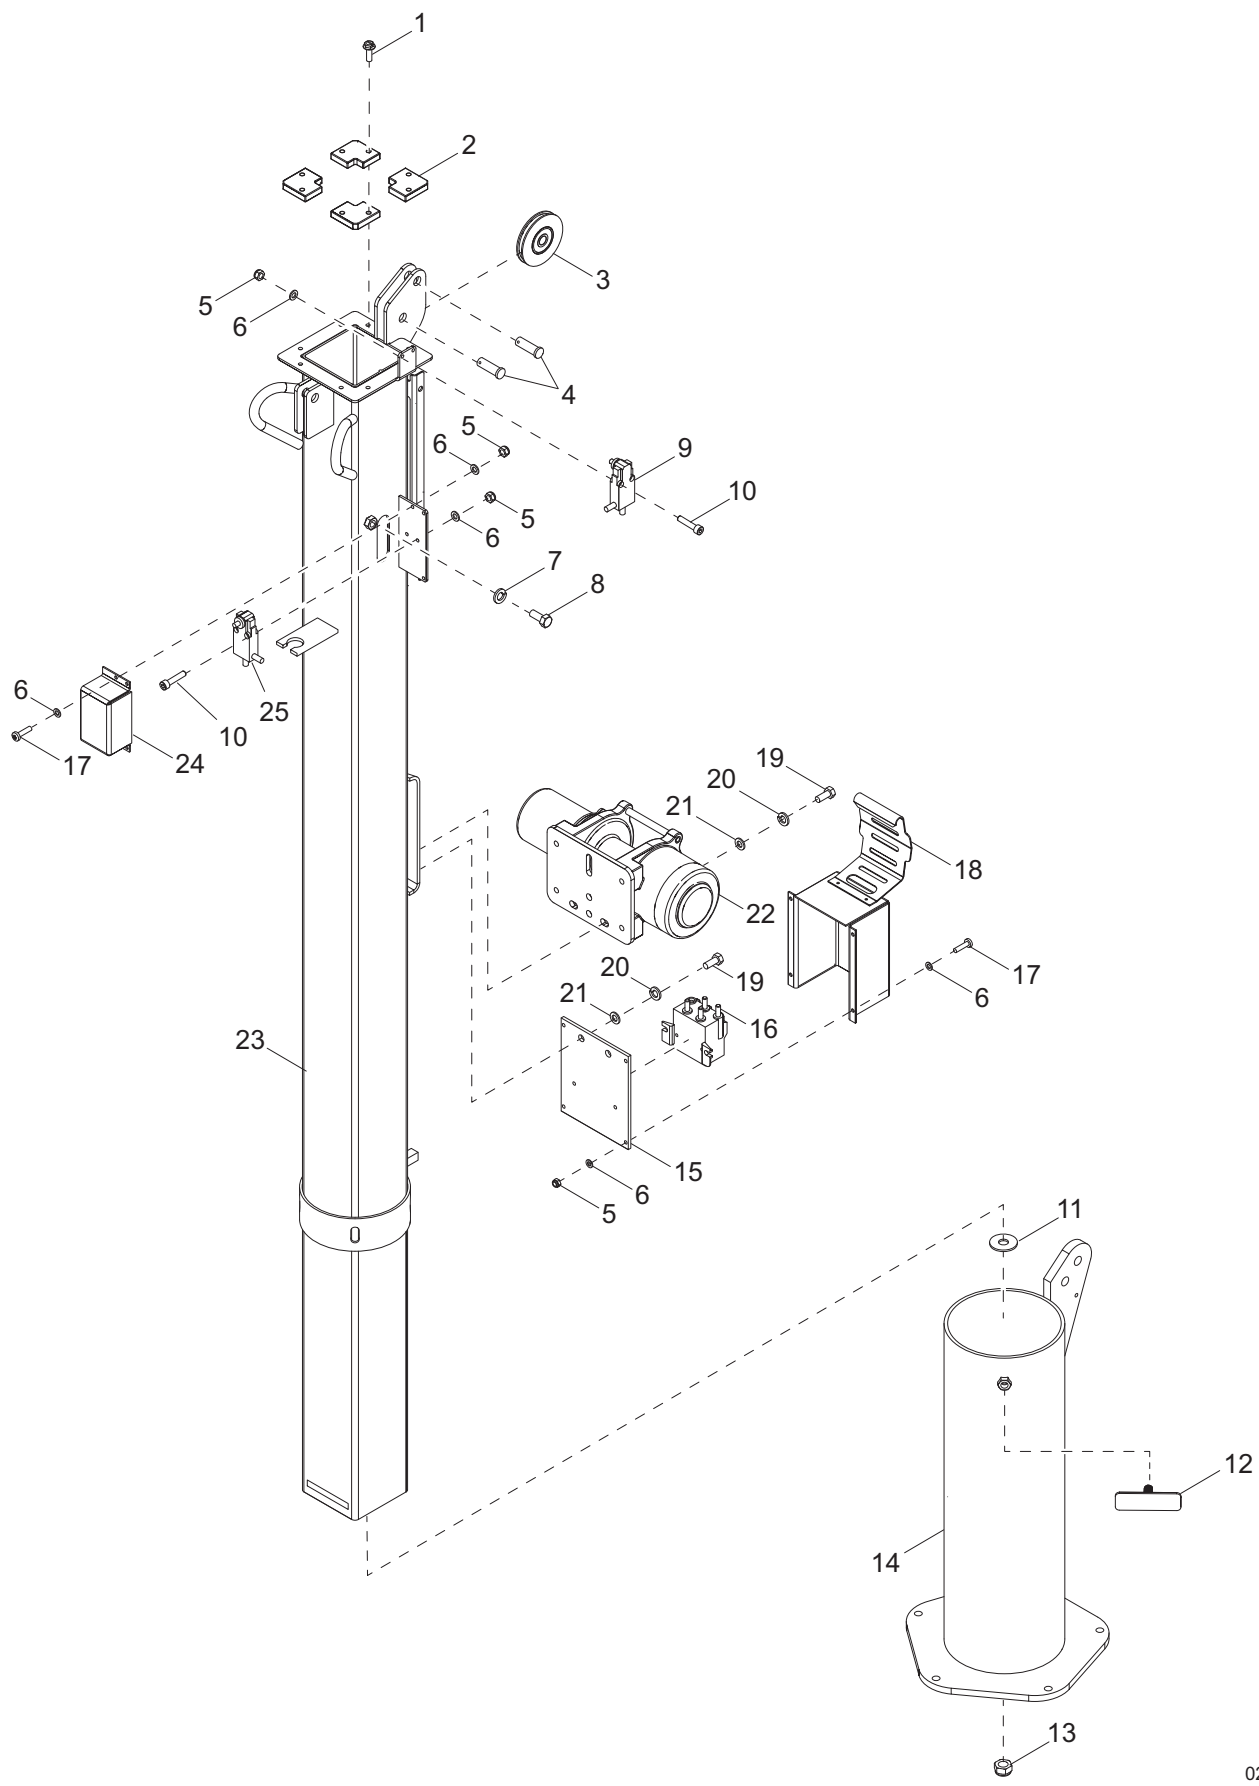


02580

MAST ASSEMBLY - BOTTOM POST - ELECTRIC WINCH

Item	Part No.	Qty	Description	Notes
1	63358	8	Screw, .250-20 x .625 hex washer head	
2	31225	4	Guide	
3	33736	1	Assembly, pulley vertical mast	
4	63325	2	Pin, clevis .500 diameter x 1.063 UL	
5	60270	11	Nut, 8-32 nylock, G6	
6	60269	18	Washer, #8 flat .433/.036	
7	60703	2	Washer, .375 split lock, SS	
8	62269	2	Screw, .375-16 x .75 hex, SS - red	
9	31740	1	Assembly, down switch	
10	67190	4	Screw, 8-32 x 1.125 socket head, SS	
11	60247	1	Washer, .750 flat 2.020/.130	
12	10000018317	1	Weldment, T-handle	
13	60584	1	Nut, .750-10 nylock, G5	
14	31218B	1	Weldment, mast rotation tube	
15	37207B	1	Plate, contactor	
16	11293	1	Contactor	hardware included
17	60244	7	Screw, 8-32 x .750 pan Phillips, G2	
18	37468B	1	Weldment, winch cover	
19	60205	5	Screw, .375-16 x 1.0 standard hex, G5	
20	60206	5	Washer, .375 split lock	
21	60386	5	Washer, .375 flat .993/.064	
22	12874	1	Winch, electric - 770 lb hoist	
23	37462B	1	Weldment, mast 4.0 in	
24	37205B	1	Cover, up limit switch	
25	31739	1	Assembly, up stop switch	
--	12922	2	Boot, battery cable - red	
--	31742	1	Wire group, electric winch box	
--	31743	1	Harness, winch power cables	

ENCLOSURE ASSEMBLY (1 OF 2)

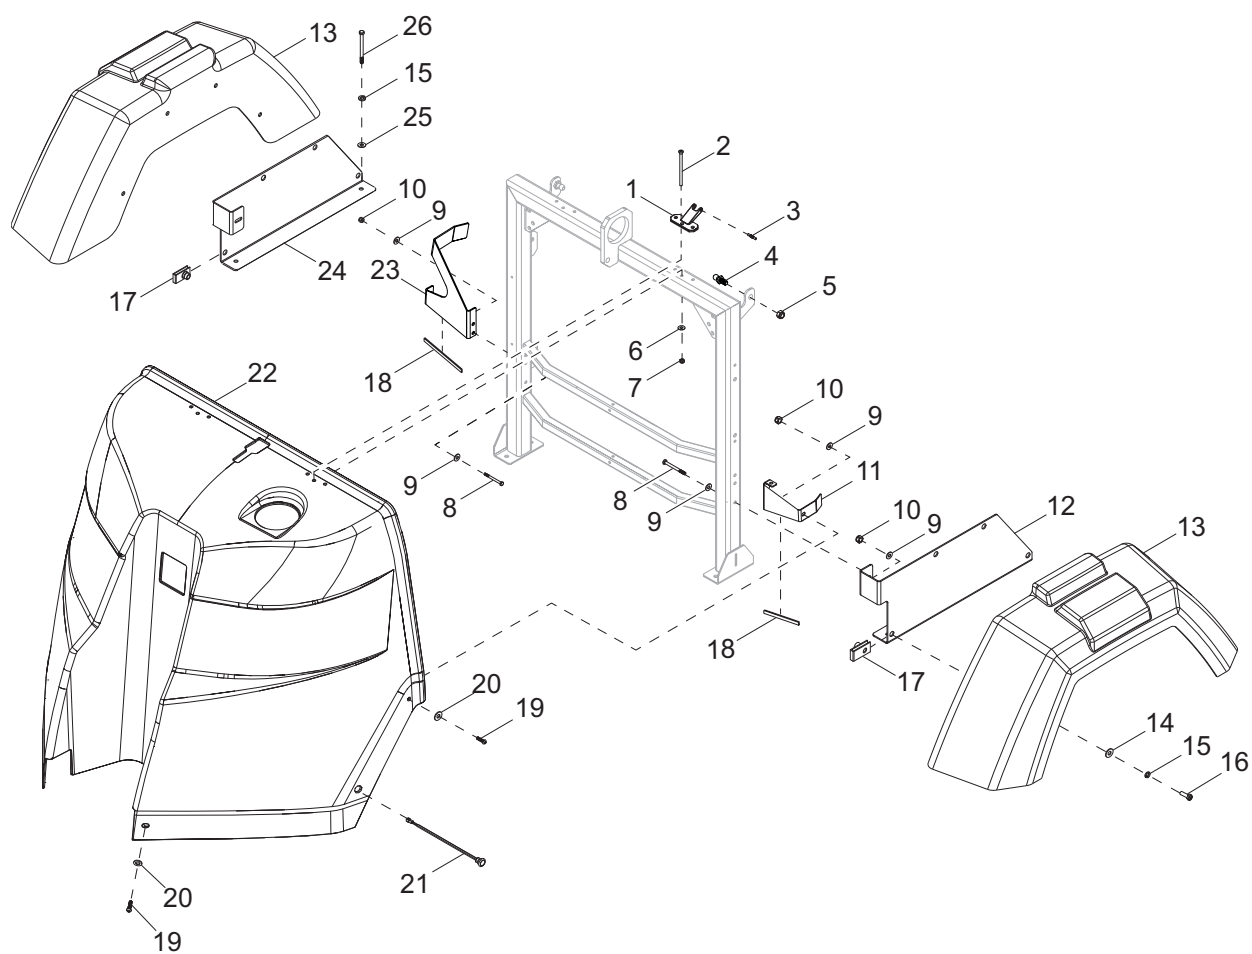


02435

ENCLOSURE ASSEMBLY (1 OF 2)

Item	Part No.	Qty	Description	Notes
1	10000022542	2	Hinge, offset housing leaf - front	
2	35282	6	Screw, 10-24 x 3.0 flat head Phillips, SS	
3	10000022543	2	Pin, offset housing hinge - knurled	
4	35293	2	Ball stud, 10mm, .312-18	
5	60303	2	Nut, .312-18 nylock, G2	
6	60237	12	Washer, #10 flat .495/.036	
7	60457	12	Nut, M6-1.0 weld, class 5	
8	61234	6	Screw, .250-20 x 2.750 standard hex, G5	
9	60243	12	Washer, .250 flat .735/.060	
10	60144	8	Nut, .250-20 nylock, G5	
11	10000017357	1	Guide bracket, enclosure meeting -LH	
12	35141B	1	Bracket, mounting fender - left	
13	10000017287	2	Fender, plastic, 13 in. wheel - textured black	
14	60386	8	Washer, .375 flat .993/.064	
15	60271	8	Washer, .312 split lock	
16	60028	8	Screw, .312-18 x 1.0 standard hex, G5	
17	62086	8	Nut, .312-18 U-clip - short type	
18	68070	4	Screw, .250-20 x 1.00 button hex, SS	
19	60696	6	Washer, .250 flat .625/.050, SS	
20	36961	2	Assembly, amber side marker light	
21	10000012656	1	Enclosure, front cover	
22	10000017378	1	Guide bracket, enclosure meeting -RH	
23	35216B	2	Bracket, mounting fender - right	
24	60119	6	Washer, .312 flat .875/.070	
25	60404	4	Screw, .312-18 x 1.250 standard hex, G5	

ENCLOSURE ASSEMBLY (2 OF 2)

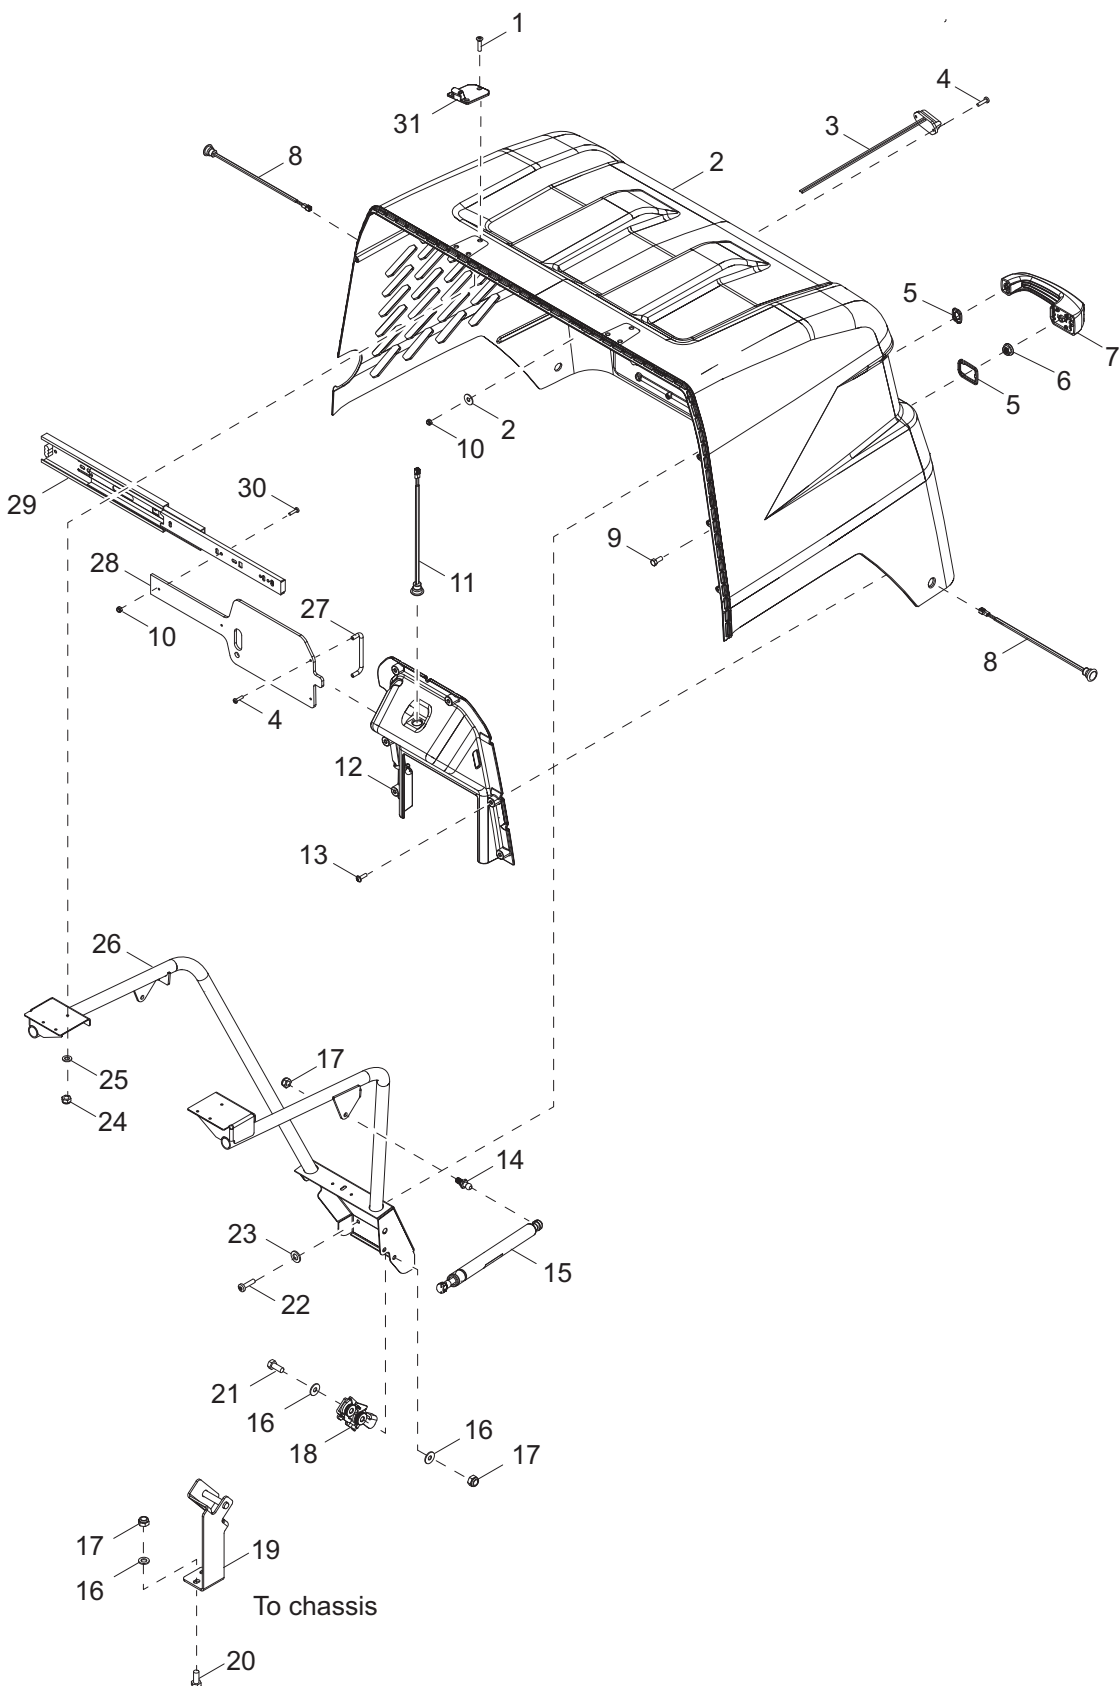


02436

ENCLOSURE ASSEMBLY (2 OF 2)

Item	Part No.	Qty	Description	Notes
1	35290	6	Screw, 10-24 x 1.00 flat Phillips, SS	
2	10000012659	1	Housing, rear textured - CAT yellow	
3	36963	1	Assembly, license plate light	
4	60694	4	Screw, 8-32 x .750 pan Phillips, SS	
5	70216	1	Gasket, kit handle, push button	
6	60036	1	Nut, M6-1.00 serrated flange, G8.8	
7	35138	1	Handle, push-button padlock	
8	36962	2	Assembly, red side marker	
9	60335	1	Screw, M6-1.00 x 25 standard hex, SS	
10	60270	4	Nut, 8-32 nylock, class 6	
11	36964	1	Assembly, controls light	
12	10000012596	1	Bezel, control panel textured - black	
13	10000017348	6	Screw, D60-2.14 x 20TRWH	
14	35293	2	Ball stud, 10mm, .313-18	
15	35137	2	Gas shock, 120 lb	
16	60119	6	Washer, .312 flat .875/.070	
17	60303	6	Nut, .312-18 nylock, G2	
18	35139	1	Latch, rotary	
19	37178B	1	Mount, door latch striker	
20	61066	2	Screw, .312-18 x 1.00 carriage square - SS	
21	62001	2	Screw, .312-18 x 1.250 standard hex, G5	
22	60146	3	Screw,	
23	60243	3	Washer, .250 flat .735/.060	
24	60457	6	Nut, 10-24 nylock, G2 ZC	
25	60237	2	Washer, #10 flat .495/.036 ZC	
26	37012B	1	Weldment, enclosure structure	
27	37123	1	Handle, control box cover	
28	10000017623	1	Cover, sliding control panel	
29	36914	1	Slide, control box cover	
30	62054	2	Screw, 8-32 x .500 pan Phillips - SS	
31	10000022523	2	Hinge, leaf offset housing - rear	
--	60335	1	Screw, M6-1.00 x 25 standard hex, SS	
--	60375	1	Clamp, tubing - .312 lt duty	

CONTROL BOX ASSEMBLY

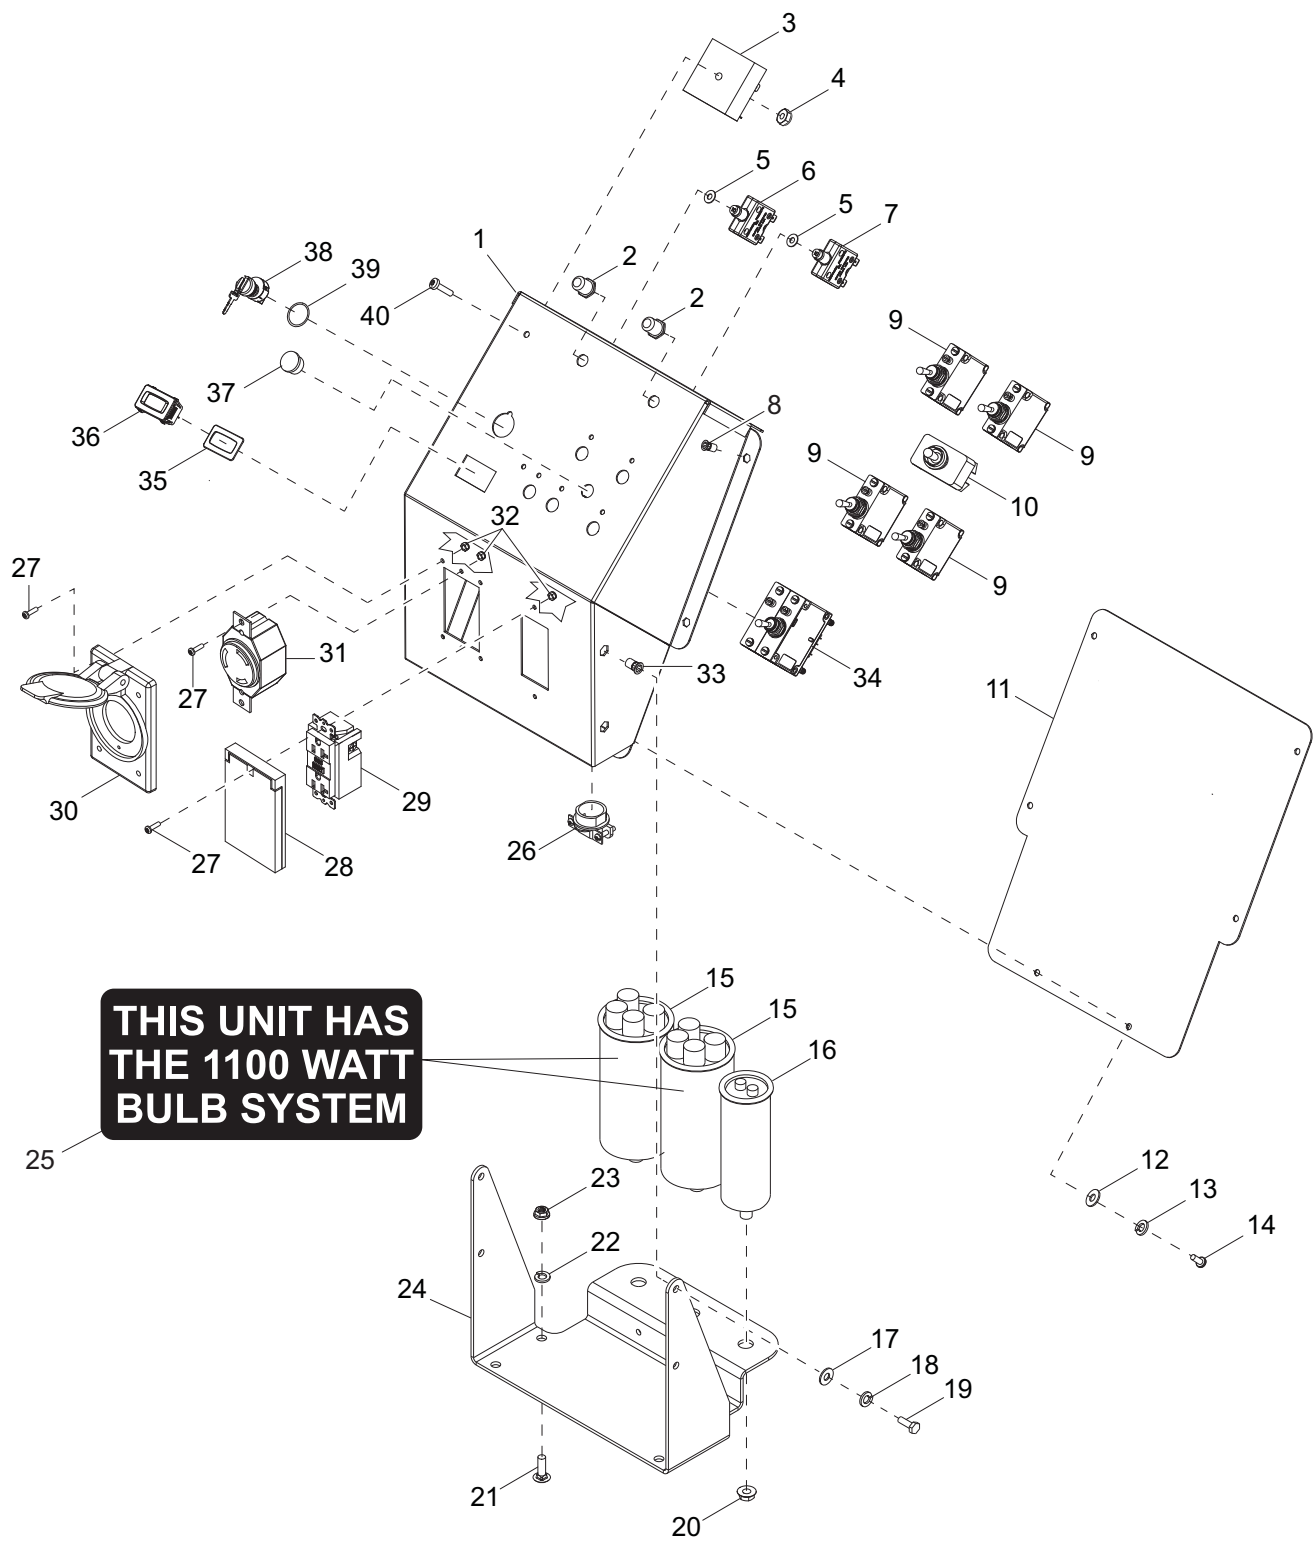


02584

CONTROL BOX ASSEMBLY

Item	Part No.	Qty	Description	Notes
1	36884B	1	Control box	
2	36938	2	Boot, push button breaker	
3	14201	1	Relay, 10A SPDT, time delay - 15 sec fixed	
4	60061	5	Nut, 10-32 nylock	
5	60386	2	Washer, .375 flat .993/.064	
6	36937	1	Breaker, 10A DC	
7	36935	1	Breaker, 15A, 1 pole, 250V	
8	62234	6	Insert, threaded #10-32 hex .020-.130 grip	
9	36880	4	Switch, light - 15A	
10	65707	1	Switch, toggle - SPDT spring	Electric mast only
11	36885B	1	Cover, control panel box	
12	60237	6	Washer, #10 flat .495/0.36	
13	60252	6	Washer, #10 split lock	
14	62254	6	Screw, 10-32 x .500 serrated flange, SS	
15	10000024477	2	Capacitor, dual 24 μ F/24 μ F 5% 540VAC stud mount	
16	36980	1	Capacitor, 25 μ F, 5% 440VAC, sealed stud mount	
17	60243	4	Washer, .250 flat .735/.060	
18	60286	4	Washer, .250 split lock	
19	60281	4	Screw, .250-20 x .750 standard hex, G5	
20	60148	3	Nut, M12-1.75 serrated flange, G8.8	
21	61066	4	Screw, .312-18 x 1.0 carriage, SS	
22	60119	4	Washer, .312 flat .875/.070	
23	60095	4	Nut, .312-18 serrated flange	
24	38409B	1	Bracket, control box mounting	
25	10000030392	2	Decal, 1100W bulb system	
26	14219	1	Strain relief - .75 Romex w/nut	
27	62210	6	Screw, 6-32 x .50 pan Phillips, SS	
28	37017	1	Cover receptacle - weather proof, 20A GFCI single	
29	14130	1	Receptacle, 120V/20A GFI	
30	36939	1	Cover, receptacle - weather proof 20/30A twist-lock	
31	14137	1	Receptacle, 240V/30A twist	
32	60728	6	Nut, 6-32 nylock	
33	63231	4	Insert, threaded .250-20 hex .027-.165 grip	
34	36975	1	Breaker, 30A main	
35	36944	1	Gasket, hour meter	
36	36886	1	Meter, hour	
37	65798	1	Plug	Manual mast only
38	36882	1	Switch, sealed key, 4-position	
39	37042	1	O-ring, .75IDx15-16 in. x 3/32 in	
40	63308	1	Screw, 10-32 x 1.250 pan Phillips, SS	
--	68282	1	Wire group, control box - electric mast	
--	68283	1	Harness, generator to control box	
--	68284	1	Harness, control box to electric mast	

CONTROL BOX ASSEMBLY - POWERZONE OPTION (1 OF 2)

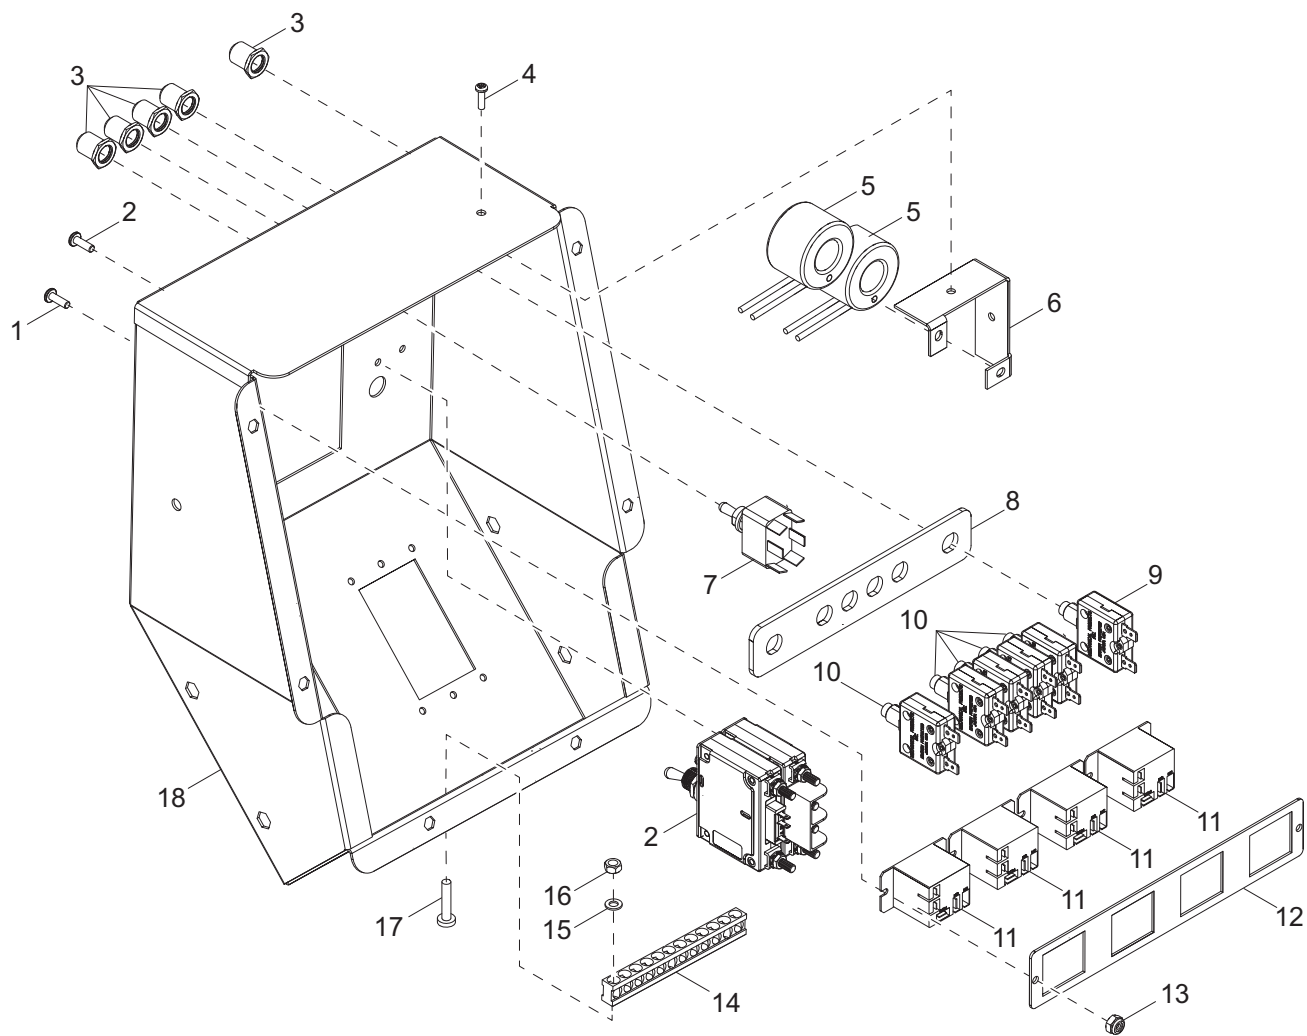


02345

CONTROL BOX ASSEMBLY - POWERZONE OPTION (1 OF 2)

Item	Part No.	Qty	Description	Notes
1	62054	3	Screw, 8-32 x .500 pan Phillips,- SS	with hardware
2	36975	2	Breaker, 30A main	
3	36938	6	Boot, push button breaker	
4	62210	6	Screw, 6-32 x .50 pan Phillips - SS	
5	66255	2	Transformer, current	
6	38449B	1	Bracket, CT mount	
7	10000031493	1	Switch, toggle - SPST 20A sealed	
8	38448B	1	Spacer, breaker control box	
9	36937	1	Breaker, 10A DC	
10	36935	5	Breaker, 15A, 250V, 1 pole	
11	29759	4	Relay, 12V coil 120-240 VAC rated	
12	38447B	1	Bracket, relay	
13	60270	3	Nut, 8-32 nylock, G6	
14	14204	1	Kit, ground bar	
15	60252	6	Washer, #10 split lock	
16	60318	2	Nut, 8-32 Hex, G5	
17	60406	2	Screw, 8-32 x 1.0 pan Phillips, G2	
18	37823B	1	Box, control - Powerzone	

CONTROL BOX ASSEMBLY - POWERZONE OPTION (2 OF 2)

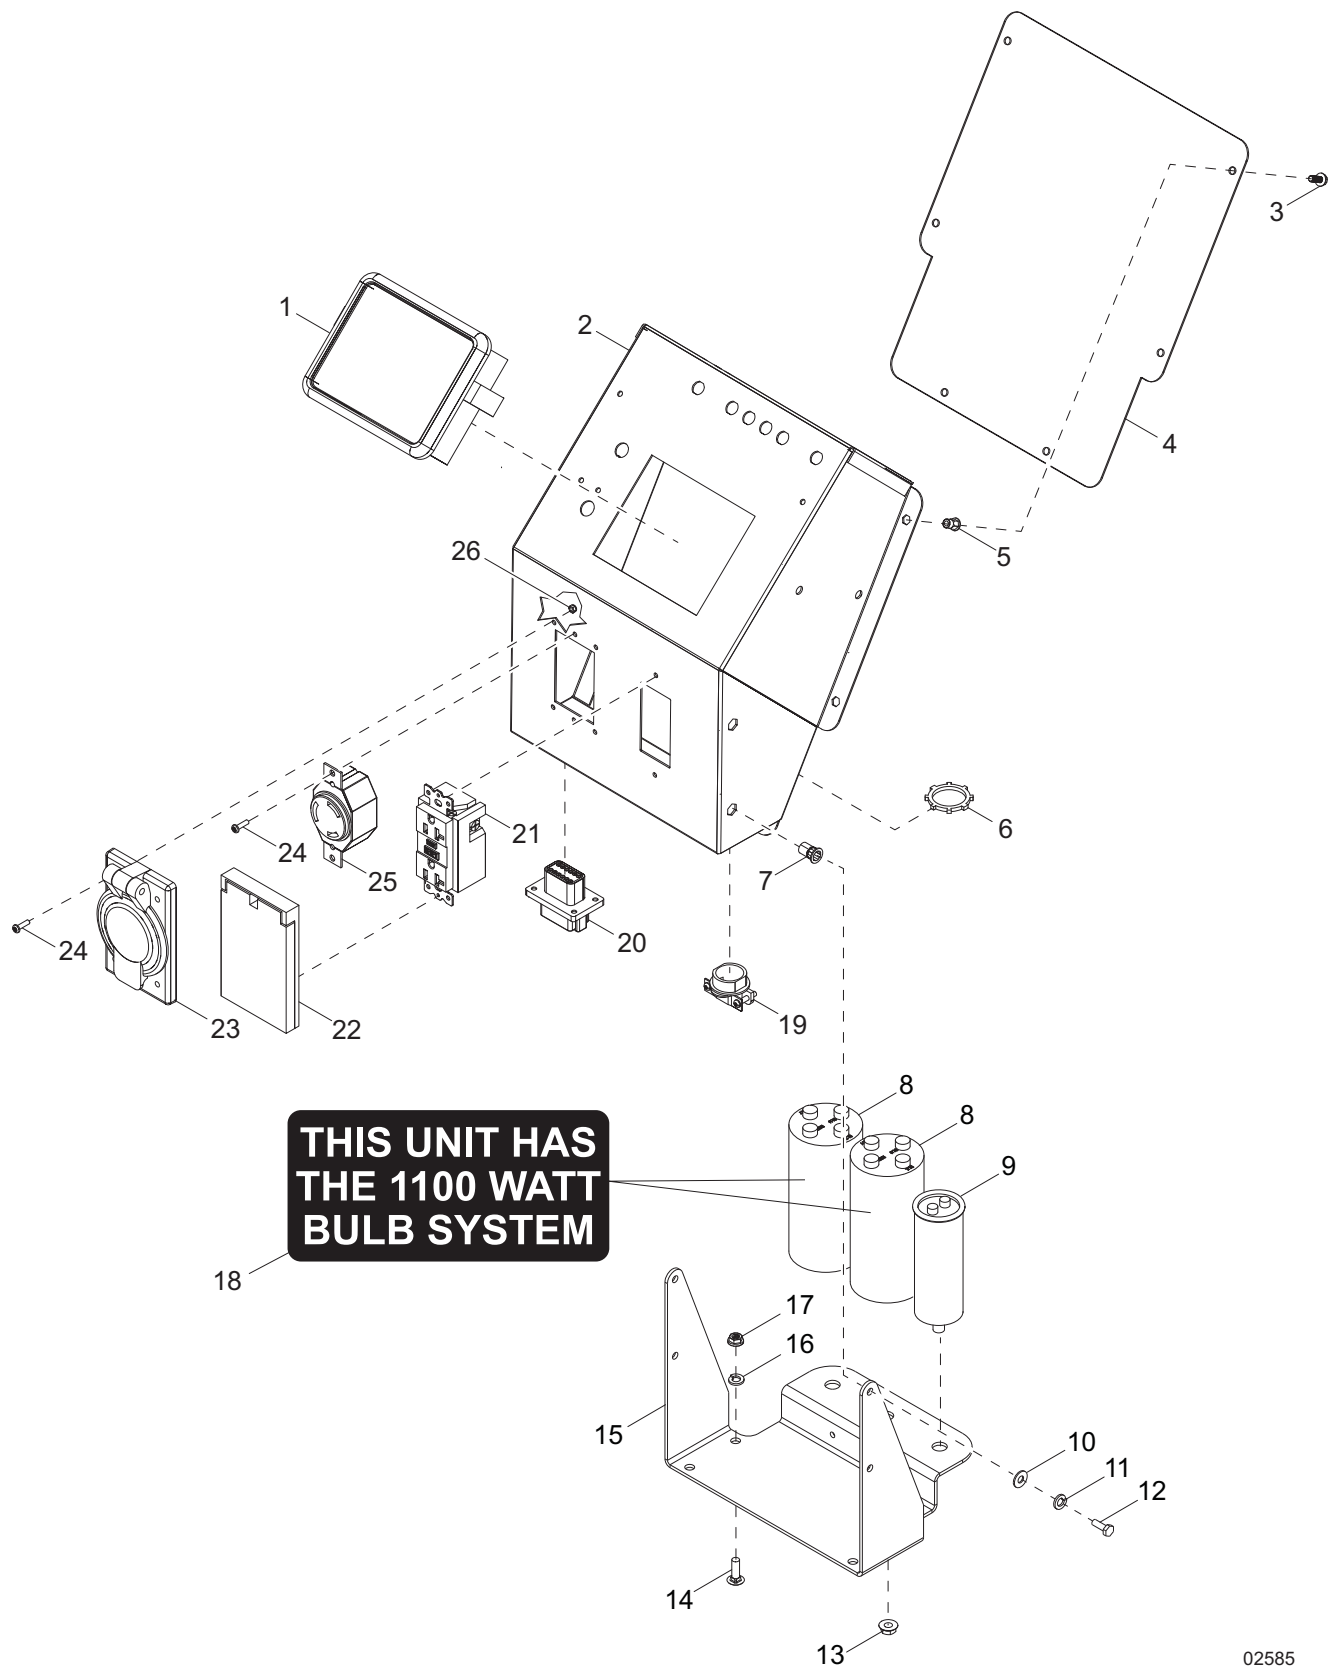


02585

CONTROL BOX ASSEMBLY - POWERZONE OPTION (2 OF 2)

Item	Part No.	Qty	Description	Notes
1	70137	1	Controller, Deep Sea - programmed	
2	37823B	1	Box, PZ control panel	
3	60277	6	Screw, 10-32 x .500 pan Phillips, G2	
4	38413B	1	Cover, control panel box	
5	62234	6	Insert, 10-32 hex, .020-.130 grip, threaded	
6	16300	2	Nut, .750 Romex strain relief	
7	63231	4	Insert, .250-20 hex, .027-.165 grip, threaded	
8	10000024477	2	Capacitor, dual 24 μ F/24 μ F 5% 540VAC stud mount	
9	36980	1	Capacitor, 25 μ F 5% 440VAC, sealed stud mount	
10	60243	4	Washer, .250 flat .735/.060	
11	60286	4	Washer, .250 split lock	
12	60647	4	Screw, .250-20 x .500 hex, G5	
13	60148	3	Nut, M12-1.75 serrated flange, G8.8	
14	61066	4	Screw, .312-18 x 1.0 carriage - SS	
15	38409B	1	Bracket, control box mounting	
16	60119	4	Washer, .312 flat .875/.070	
17	60095	4	Nut, .312-18 serrated flange - case hardened	
18	10000030392	2	Decal, 1100W bulb system	
19	14219	2	Strain relief, .75 Romex w/nut	
20	66695	1	Connector, Duetsch 12 position - flange DT	
21	14130	1	Receptacle, 120V/20A GFI	
22	37017	1	Cover, receptacle 20A GFCI single - weatherproof	
23	36939	1	Cover, receptacle 20/30A - weatherproof	
24	62210	6	Screw, 8-32 x .500 pan Phillips - SS	
25	14137	1	Receptacle, 250V/ 30A twist	
26	60728	6	Nut, 6-32 nylock, G5	
--	68534	1	Harness, control box PZ	replaces p/n 68284
--	68535	1	Harness, gen to control box PZ	replaces p/n 68283
--	68844	1	Harness, engine PZ	replaces p/n 37034


COOLING SYSTEM ASSEMBLY

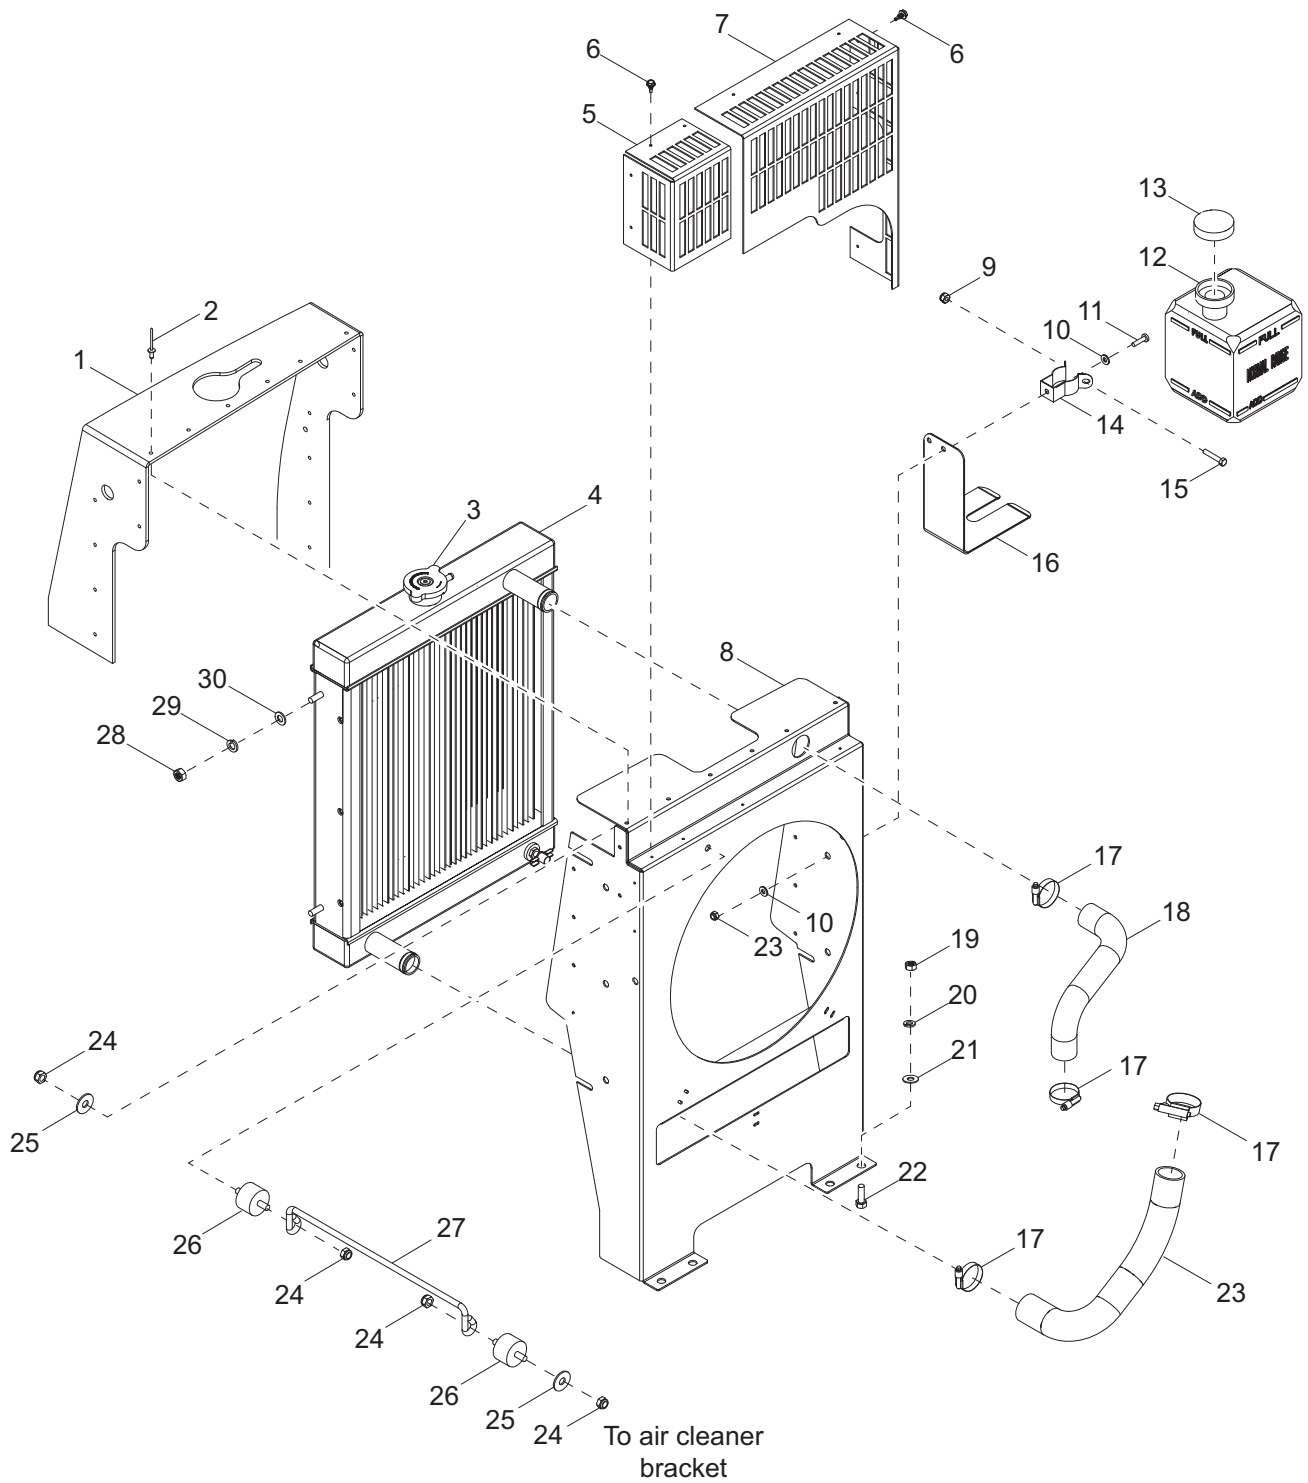

02451

COOLING SYSTEM ASSEMBLY


Item	Part No.	Qty	Description	Notes
1	36979	1	Seal, rubber, cooling	
2	60195	18	Rivet, .188 dia. x .375 to .500 grip, large flange	
3	19219	1	Cap, radiator pressure small - 14.7 psi	
4	A0000335661	1	Radiator	
5	36227B	1	Guard, fan, left	
6	60364	9	Screw, 10-16x5.0 std hex, G2	
7	17245B	1	Guard, fan, right	
8	21321B	1	Fan shroud	
9	60144	1	Nut, .250-20 nylock, G5	
10	60067	4	Washer, #10 flat .435/.060, SS	
11	61180	2	Screw, 10-32 x .750 pan Phillips, SS	
12	20287	1	Jug, overflow 2 qt. (.5 gal)	
13	19714	1	Cap, overflow jug	
14	19726	1	Clamp, overflow bottle	
15	60414	1	Screw, .250-20 x 1.50 standard hex, G5	
16	22419B	1	Bracket, support overflow jug .5 gallon	
17	15422	4	Clamp, hose - SAE 020 (.75-1.75)	
18	31543	1	Hose, radiator - upper	
19	60285	14	Nut .312-18 hex, G2	
20	60271	21	Washer, .312 split lock	
21	60119	24	Washer .312 flat .875/.070	
22	61066	4	Screw, .312-18 x 1.00 carriage 18-8 SS	
23	31542	1	Hose, radiator - lower	
24	62079	4	Nut, .312-18 nylock jam	
25	60119	2	Washer, .312 flat .875/.070	
26	34052	2	Isolator, rubber 1.50 x 1.0, 5/16-18 studs	
27	36989	1	Rod, radiator stay	
28	60032	4	Nut, M8-1.25 hex, G8.8	
29	60029	2	Washer, M8 split lock	
30	60166	2	Washer, M8 flat	

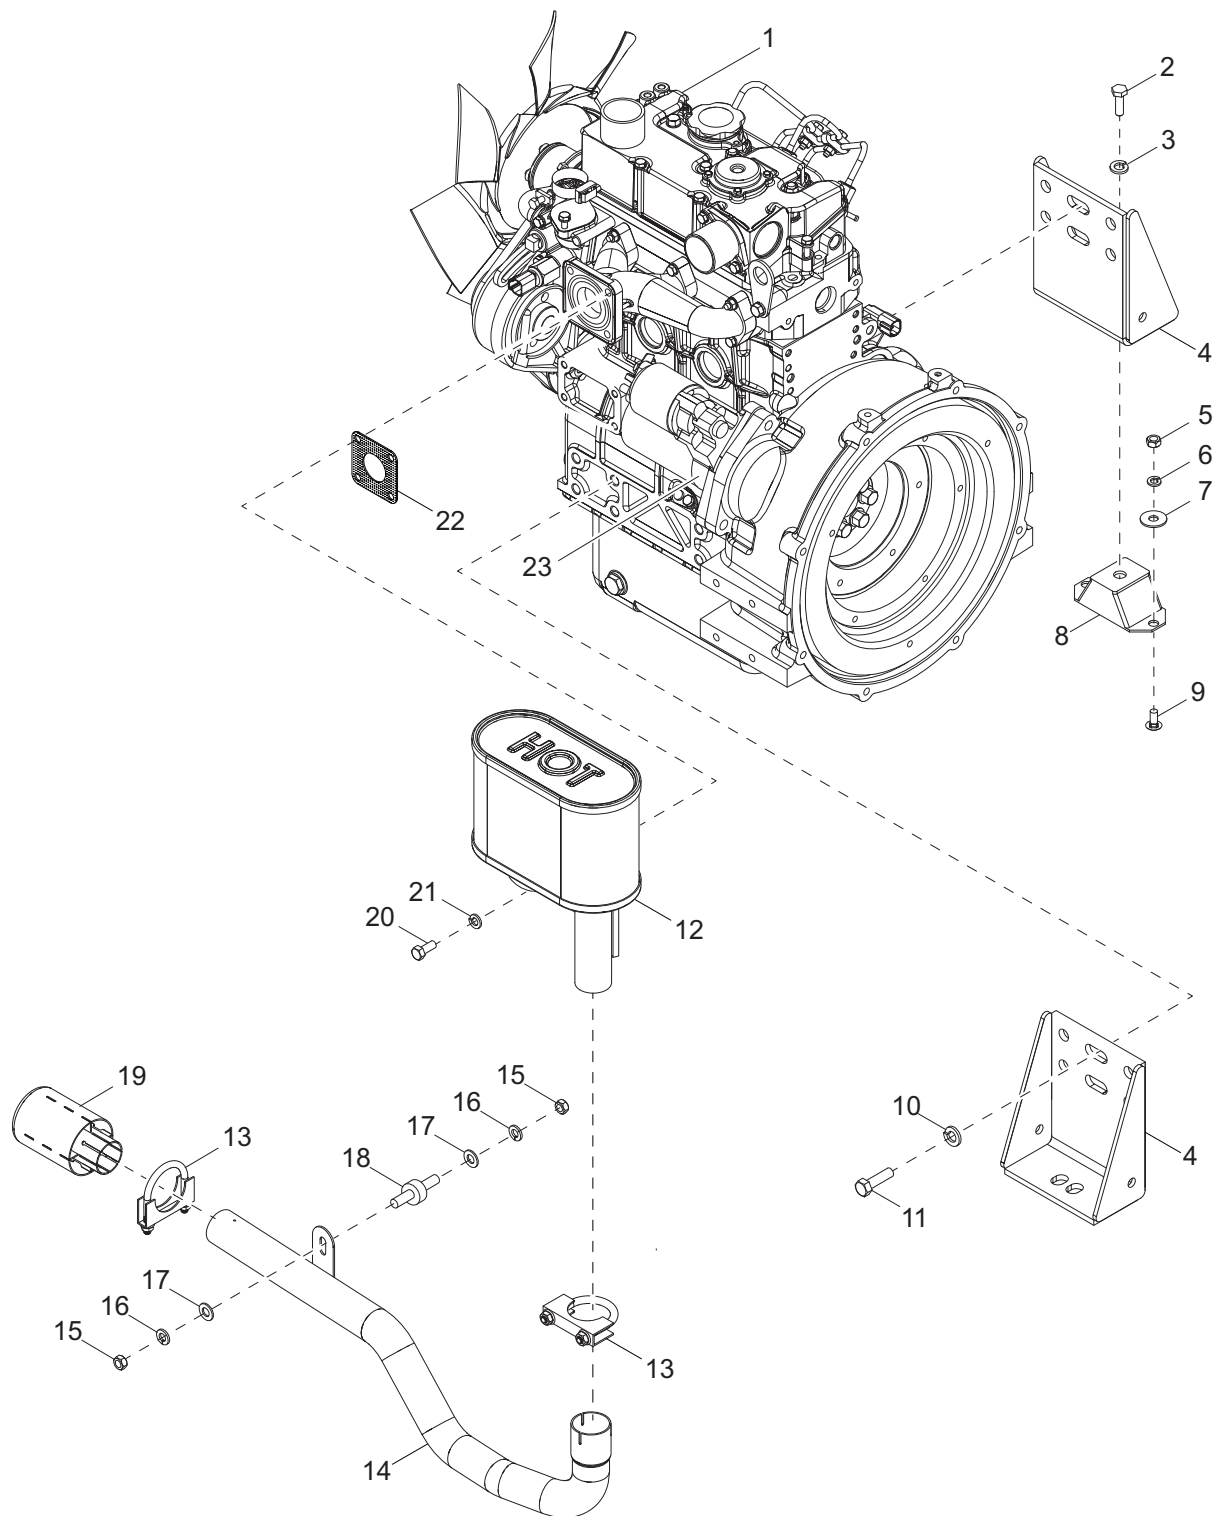

03207

Item	Part No.	Qty	Description	Notes
1	73190	1	Engine, Caterpillar C1.1, TF4	
2	60275	4	Screw, .500-13 x 1.0 hex, G5	
3	60702	4	Washer, .500 split lock, SS	
4	12058B	2	Weldment, engine mount	
5	60285	4	Nut, .312-18 hex, G2	
6	60271	4	Washer, .312 split lock	
7	60119	4	Washer, .312 flat .875/.070	
8	15241	2	Isolator, 80-200 lbs - 2 inch WD	
9	61066	4	Screw, .312-18 x 1.0 carriage, SS	
10	60026	8	Washer, M10 split lock	
11	60422	8	Screw, M10-1.25 x 25 standard hex, G8.8	
12	17426	1	Muffler	
13	68082	2	Clamp, muffler 1.63	
14	10000033409	1	Tube, exhaust	
15	60285	2	Nut, .312-18 hex, G2	
16	60271	2	Washer, .312 split lock	
17	60119	2	Washer, .312 flat .875/.070	
18	34052	1	Isolator, 1.50 x 1.00 - .312-18 studs	
19	10000021954		Tip, exhaust	
20	60029	4	Washer, M8 split lock	
21	60165	4	Screw, M8-1.250 x 16 hex, G10.9	
22	11042SRV	1	Gasket, muffler	
23	39843	1	Starter	
--	75007	1	Harness, main	

Note: Engine and generator parts used in all Generac Mobile Products, LLC equipment carry the Original Equipment Manufacturer (OEM) warranty unless otherwise stated. OEM warranty parts must be purchased through an OEM dealer. Please contact Generac Mobile Products, LLC with questions.

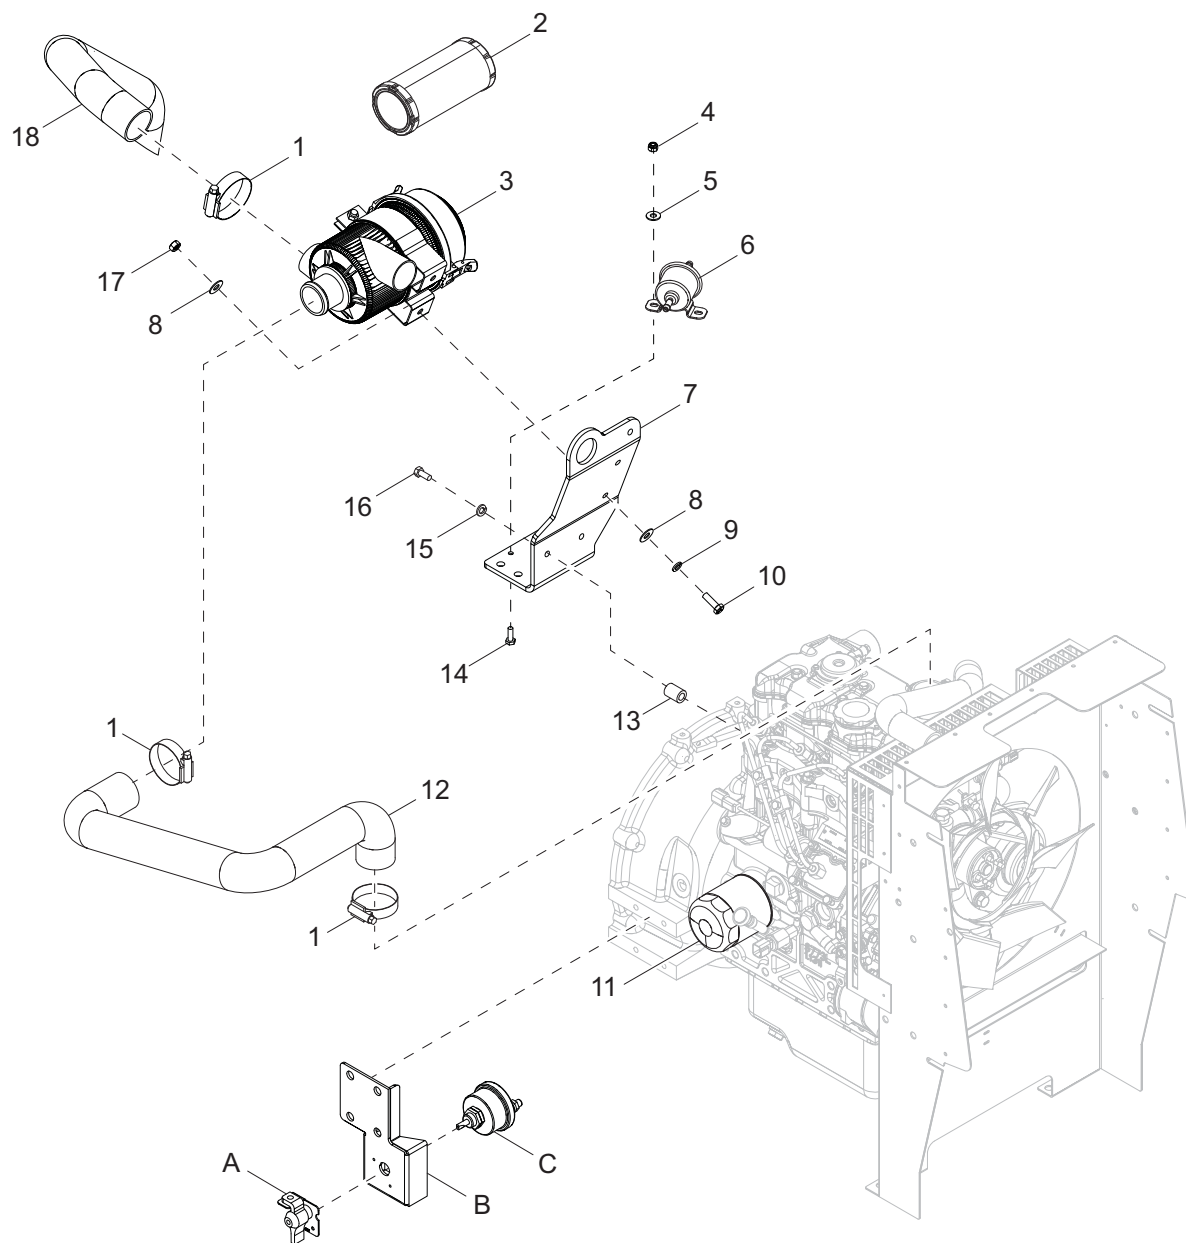

02453

ENGINE ASSEMBLY (2 OF 2)


Item	Part No.	Qty	Description	Notes
1	60316	3	Clamp, hose - SAE 032 (1.56-2.50)	
2	10000035428	1	Element, air filter	
3	10000021718	1	Filter, air, w bracket	incl. element
4	60144	2	Nut, .250-20 nylock, G5	
5	60243	2	Washer, .250 flat .735/.060	
6	12994	1	Fuel pump, electric	
7	17062B	1	Bracket, air cleaner	
8	60119	6	Washer, .312 flat .875/.070	
9	60271	4	Washer, .312 split lock	
10	60028	2	Screw, .312-18 x 1.00 standard hex, G5	
11	39842	1	Filter, oil	
12	31541	1	Hose, air	
13	41235ZY	2	Spacer, .750OD x .44ID x 1.0 long	
14	60281	2	Screw, .250-20 x .750 standard hex, G5	
15	60206	2	Washer, .375 split lock - hardened	
16	65719	2	Screw, M8-1.25 x .45 standard hex, G10.9	
17	60285	4	Nut, .312-18 hex, G2	
18	10434	1	Hose, air intake	

Battery Disconnect: If equipped

A	65499	1	Switch lockout lever kit
B	10000008538	1	Bracket, battery disconnect
C	65498	1	Switch, disconnect

Note: Engine and generator parts used in all Generac Mobile Products, LLC equipment carry the Original Equipment Manufacturer (OEM) warranty unless otherwise stated. OEM warranty parts must be purchased through an OEM dealer. Please contact Generac Mobile Products, LLC with questions.

GENERATOR ASSEMBLY

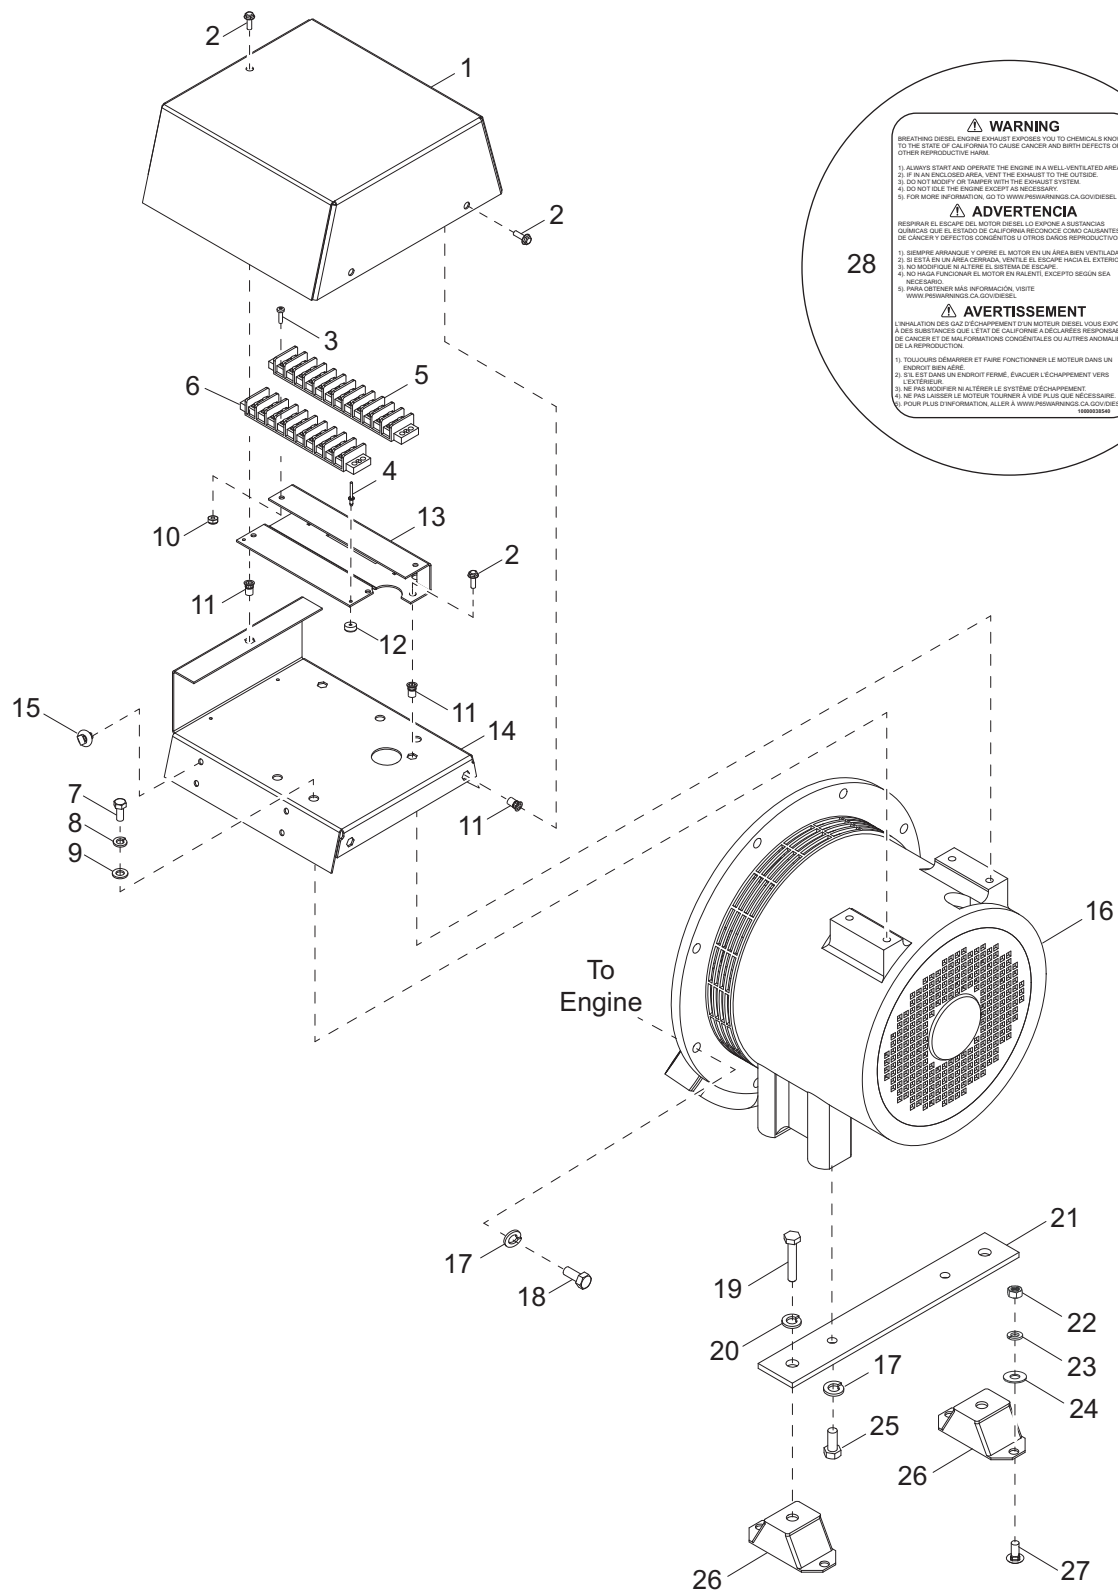

28

WARNING
BREATHING DIESEL ENGINE EXHAUST EXPOSES YOU TO CHEMICALS KNOWN TO THE STATE OF CALIFORNIA TO CAUSE CANCER AND BIRTH DEFECTS OR OTHER REPRODUCTIVE HARM.

1) ALWAYS START AND OPERATE THE ENGINE IN A WELL-VENTILATED AREA.
2) IF IN AN ENCLOSED AREA, VENT THE EXHAUST TO THE OUTSIDE.
3) DO NOT TAMPER OR TAMPER WITH THE EXHAUST SYSTEM.
4) DO NOT TAKE THE ENGINE EXCEPT AS NECESSARY.
5) FOR MORE INFORMATION, GO TO WWW.PSWARNINGS.CA.GOV/DIESEL.

ADVERTENCIA
RESPIRAR EL ESCAPE DEL MOTOR DIESEL LO EXPONE A SUSTANCIAS QUÍMICAS QUE EL ESTADO DE CALIFORNIA RECONOCE COMO CAUSANTES DE CÁNCER Y DEFECTOS CONGENITALES U OTROS DAÑOS REPRODUCTIVOS.

1) SIEMPRE ARRANQUE Y CORRE EL MOTOR EN UN ÁREA BIEN VENTILADA.
2) SI ESTÁ EN UN ÁREA CERRADA, VENTILE EL ESCAPE HACIA EL EXTERIOR.
3) NO MODIFIQUE NI ALTERE EL SISTEMA DE ESCAPE.
4) NO HAGGA FUNCIONAR EL MOTOR EN RALENTÍ, EXCEPTO SEGÚN SEA NECESARIO.
5) PARA OBTENER MÁS INFORMACIÓN, VISITE WWW.PSWARNINGS.CA.GOV/DIESEL.

AVERTISSEMENT
L'INHALATION DES GAZ D'ÉCHAPPEMENT D'UN MOTEUR DIESEL VOUS EXPOSE À DES SUBSTANCES QUE LE DÉPARTEMENT DE CALIFORNIE A DÉCLARÉ RESPONSABLES DE CANCER ET DE MALFORMATIONS CONGÉNITALES OU AUTRES ANOMALIES DE LA REPRODUCTION.

1) TOUJOURS DÉMARRER ET FAIRE FONCTIONNER LE MOTEUR DANS UN ENDROIT BIEN AÉRIÉ.
2) SI L'EST DANS UN ENDROIT FERMÉ, ÉVACUER LE CHAPPEMENT VERS L'EXTÉRIEUR.
3) NE PAS MODIFIER NI ALTERER LE SYSTÈME D'ÉCHAPPEMENT.
4) NE PAS Laisser le MOTEUR tourner à vide plus que nécessaire.
5) POUR PLUS D'INFORMATION, ALLER À WWW.PSWARNINGS.CA.GOV/DIESEL.


02442

GENERATOR ASSEMBLY

Item	Part No.	Qty	Description	Notes
1	17994B	1	Cover, generator, Marathon	
2	60175	5	Screw, .250-20x.500 serrated flange hex, G5	
3	60062	4	Screw, 10-32 x .750 pan Phillips, G2	
4	60267	2	Rivet, .125 dia x .191 to .270 grip	
5	14139	1	Block terminal - 12 position	
6	14203	1	Block terminal - 10 position	
7	61082	4	Screw, M8-1.25 x 20 serrated flange hex	
8	60271	4	Washer, .312 split lock	
9	60243	4	Washer, .250 flat .735/.060	
10	60061	4	Nut, 10-32 nylock	
11	63231	9	Insert, threaded .250-20 hex .027-.165 grip	
12	15215	2	Rubber bumper	
13	36942B	1	Bracket, terminal strip	
14	54254B	1	Plate, electric junction	
15	66685	8	Mount cable tie, fir tree, .25-.28 dia,.031-.276 grip	
16	10000020581	1	Generator, Marathon, 6kW, 60Hz, cap	
17	60206	8	Washer, .375 split lock	
18	60352	8	Screw, .375-16x1.250 standard hex, G5	
19	60275	2	Screw, .500-13 x 1.00 standard hex, G5	
20	60702	2	Washer, .500 split lock, SS	
21	15045B	1	Bracket, generator mounting	
22	60285	4	Nut, .312-18 hex, G2	
23	60271	4	Washer, .312 split lock	
24	60119	4	Washer, .312 flat .875/.070	
25	60352	2	Screw, .375-16 x 1.250 standard hex, G5	
26	15241	2	Isolator, rubber - 80-200 lb	
27	61066	4	Screw, .312-18 x 1.00 carriage, SS	
--	60168	6	Screw, .312-18 x .750 standard hex, G5	For flex plate mount
--	60166	18	Washer, M8 flat DIN 125 hardened	3 each w/60168

Note: Engine and generator parts used in all Generac Mobile Products, LLC equipment carry the Original Equipment Manufacturer (OEM) warranty unless otherwise stated. OEM warranty parts must be purchased through an OEM dealer. Please contact Generac Mobile Products, LLC with questions.

COMPONENTS TO TRAILER ASSEMBLY

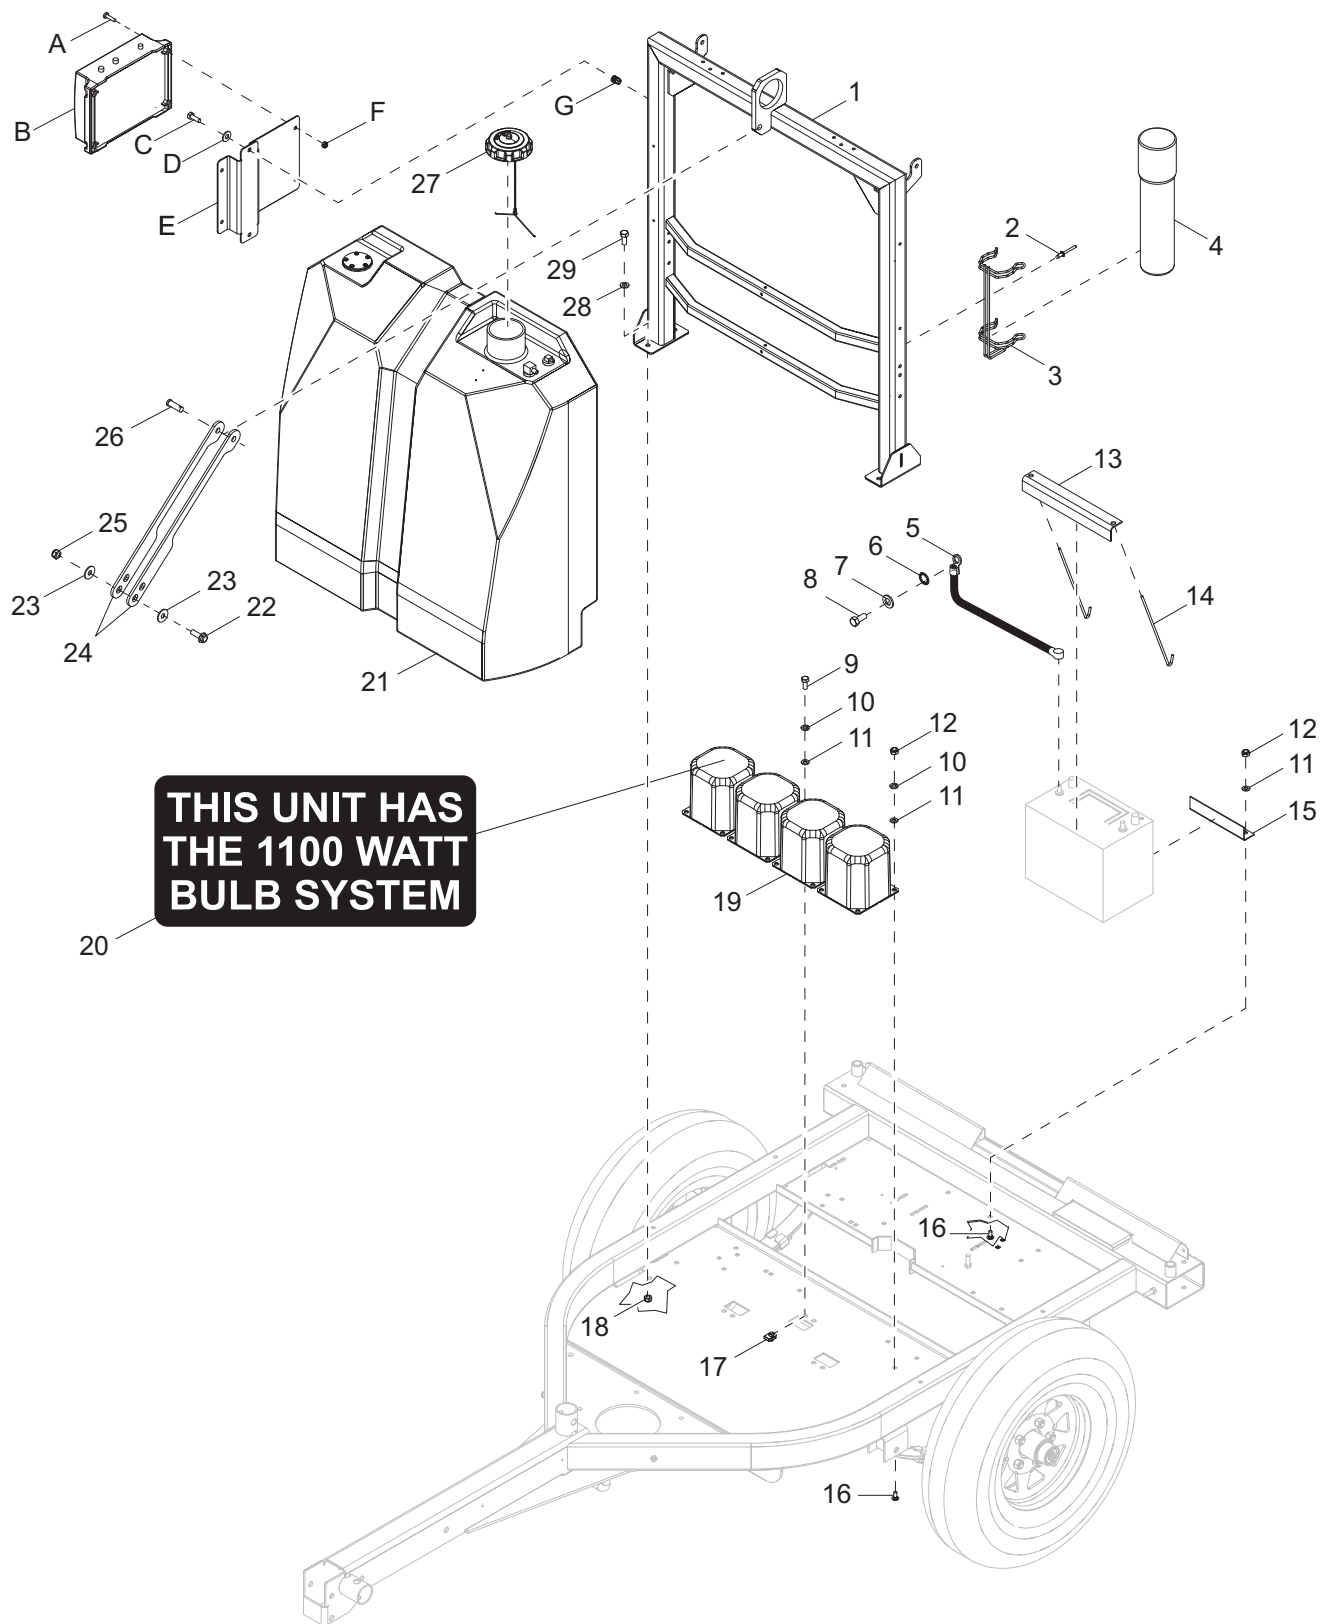


02454

COMPONENTS TO TRAILER ASSEMBLY

Item	Part No.	Qty	Description	Notes
1	10000023283	1	Weldment, lift support	
2	60195	2	Rivet, .188 dia. x .375 to .500 grip	
3	11222	1	Bracket, manual holder	
4	11121	1	Manual holder tube, black 14 inch	
5	15073	1	Cable, battery - 24" 4GA, .375 lug, black	
6	60747	1	Washer, .375 internal star	
7	60026	1	Washer, M10 split lock	
8	60495	1	Screw, M10-1.25 x 16 hex, G8.8	
9	60028	6	Screw, .312-18 x 1.0 standard hex, G5	
10	60271	8	Washer, .312 split lock	
11	60119	8	Washer, .312 flat .875/.07	
12	60285	3	Nut, .312-18 hex, G2	
13	12924B	1	Angle, battery hold-down	
14	14146	2	Bolt, J - .250-20 x 9.0	
15	17992B	1	Bracket, battery stop	
16	61066	3	Screw, .312-18 x 1.0 carriage, SS	
17	62086	6	Nut, .312-18 U-clip, short-type	
18	60358	4	Nut, .375-16 nylock, G5	
19	10000029380	4	Assembly, transformer - can and base - 60Hz-MH	
20	A0000567279	4	Decal, 1100W bulb system	
21	69919	1	Tank, fuel - 42 gal with sending unit	
22	60484	2	Screw, .500-13 x 2.0 standard hex, G5	
23	60309	4	Washer, .500 flat 1.060/.090	
24	39660B	2	Bar, chassis support	
25	62221	2	Nut, .500-13 nylock, G5	
26	63325	1	Pin, clevis - .500 dia. x 1.063 UL, ZP	
27	16326	1	Cap, fuel, 3.5 dia., diesel, vent w/tether	
28	60386	4	Washer, .375 flat .993-.064	
29	60352	4	Screw, .375-16 x 1.250 standard hex, G5	
--	50018	5 ft	Hose, fuel - .312 ID, 50 psi, SAE 30R7	
--	60777	2	Clamp, hose - .312 fuel hose, crimp style	
--	14211	4.25 ft	Hose, fuel - .188, 50 psi, SAE 30R7	
--	60778	2	Clamp, hose - .188 fuel hose, crimp style	
<i>Battery Charger: If equipped</i>				
A	60062	4	Screw, 10-32 x .750 pan Phillips, G2	
B	66212	1	Charger, battery 2-5A/1-10A, 3 stage, 2 output	
C	60281	2	Screw, .250-20 x .750 hex, G5	
D	60243	2	Washer, .250 flat .735/.060	
E	73218B	1	Bracket, battery charger	
F	60415	4	Nut, 10-32 nylock	
G	63132	2	Insert, .250-20 splined, .027-.165	

TRAILER ASSEMBLY











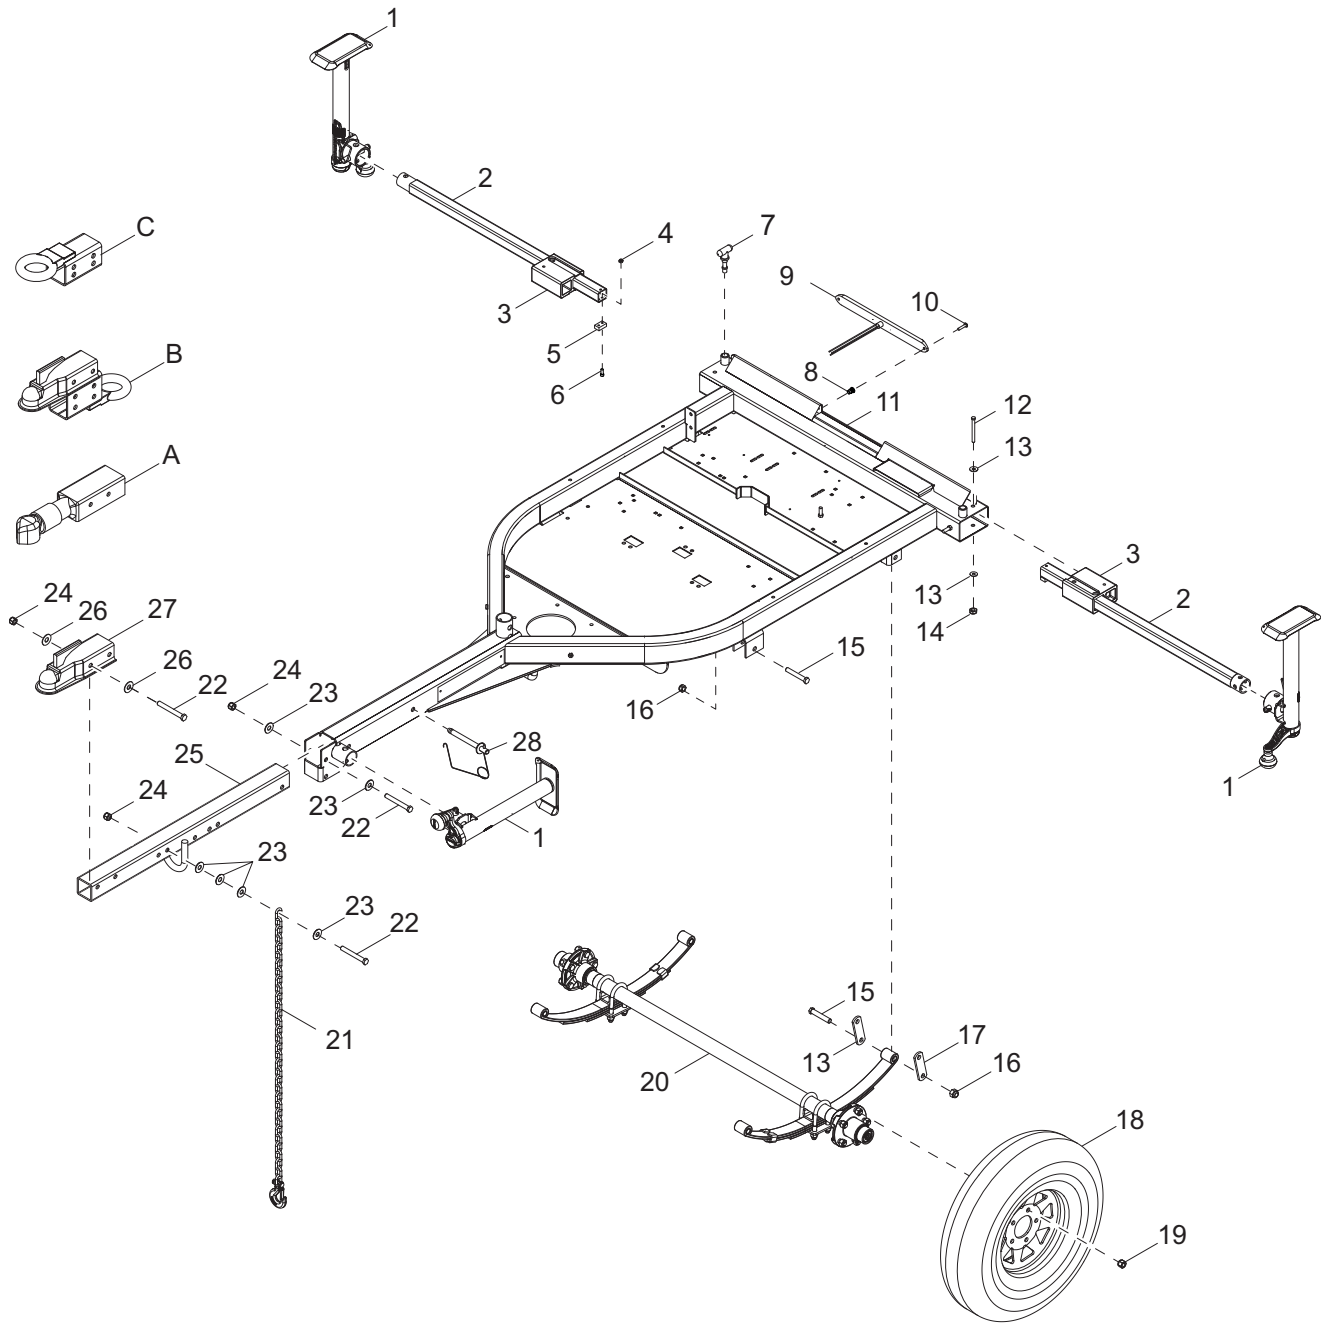


02444

TRAILER ASSEMBLY

Item	Part No.	Qty	Description	Notes
1	72126	3	Jack, top wind - 1200 lb, tube mounted	
2	70230ZY	2	Weldment, outrigger tube	
3	36869	2	Guide block (molded) - outrigger	
4	60144	4	Nut, .250-20 nylock, G5	
5	72128	2	Pad/stop, wear - outrigger	
6	73196	4	Screw, .250-20 x 2.25 socket head	
7	36890	3	Spring pin, handle	
8	73092	4	Insert, #8-32 .020-.080 grip - close sealed	
9	36960	2	Assembly, tail light	
10	60694	4	Screw, 8-32 x .750 pan Phillips	
11	10000021817	1	Weldment, lt chassis	
12	60404	2	Screw, .312-18 x 4.00 standard hex, G5	
13	60119	4	Washer, .312 flat .875/.070	
14	60303	2	Nut, .312-18, nylock, G2	
15	60503	6	Screw, shackle, .562-18 x 3.00 standard hex, G5	
16	60504	6	Nut, .562-18 lock hex, G5	
17	19637	4	Plate, shackle bracket - 3.125"	
18	15976B	2	Wheel, ST175/8013 - 1360 lb	
19	60096	10	Nut, .500-20 lug, G5	
20	34760	1	Axle, 2200lb 47TC 35SC	
21	23367	2	Chain, safety - 7800 lbs rated	
22	50215	5	Screw, .500-13 x 4.00 standard hex, G5	
23	60416	10	Washer, .500 flat 1.375/.090	
24	62221	5	Nut, .500-13 nylock, G5	
25	17969B	1	Weldment, tilt tongue	
26	60309	4	Washer, .500 flat 1.060/.090	
27	16830	1	Coupler, 2.00 ball/2.50 channel	
28	33943	2	Pin, locking .500 x 3.50	
--	68348	1	Harness, trailer wiring, tandem tow	
--	68324	1	Harness, trailer enclosure front	
--	10000020727	1	Assembly, harness extension loomed	
<i>Hitch Options: If equipped</i>				
A	13003B	1	Coupler, 2.00 ball/3.00 channel, Bulldog	
B	34792ZC	1	Weldment, combination hitch - 2.50 tongue	
C	16835B	1	Weldment, lunette ring 3.00 ID - 2.50 tongue	
--	65548	1	Adapter, 4 pin flat to 4 pin flat x 12.00	


RECOMMENDED SPARE PARTS - ENGINE



ENGINE

1. Belt	39839
2. Cap, fuel tank with lanyard	16326
3. Filter, air (element).....	10000035428
4. Filter, fuel element	39840
5. Filter, oil	39842
6. Hose, lower radiator	31542
7. Hose, upper radiator	31543
8. Element, glow plug	16693
9. Pump, fuel	12994
10. Sender, coolant temp.....	12873
11. Starter	39843

RECOMMENDED SPARE PARTS - ELECTRICAL










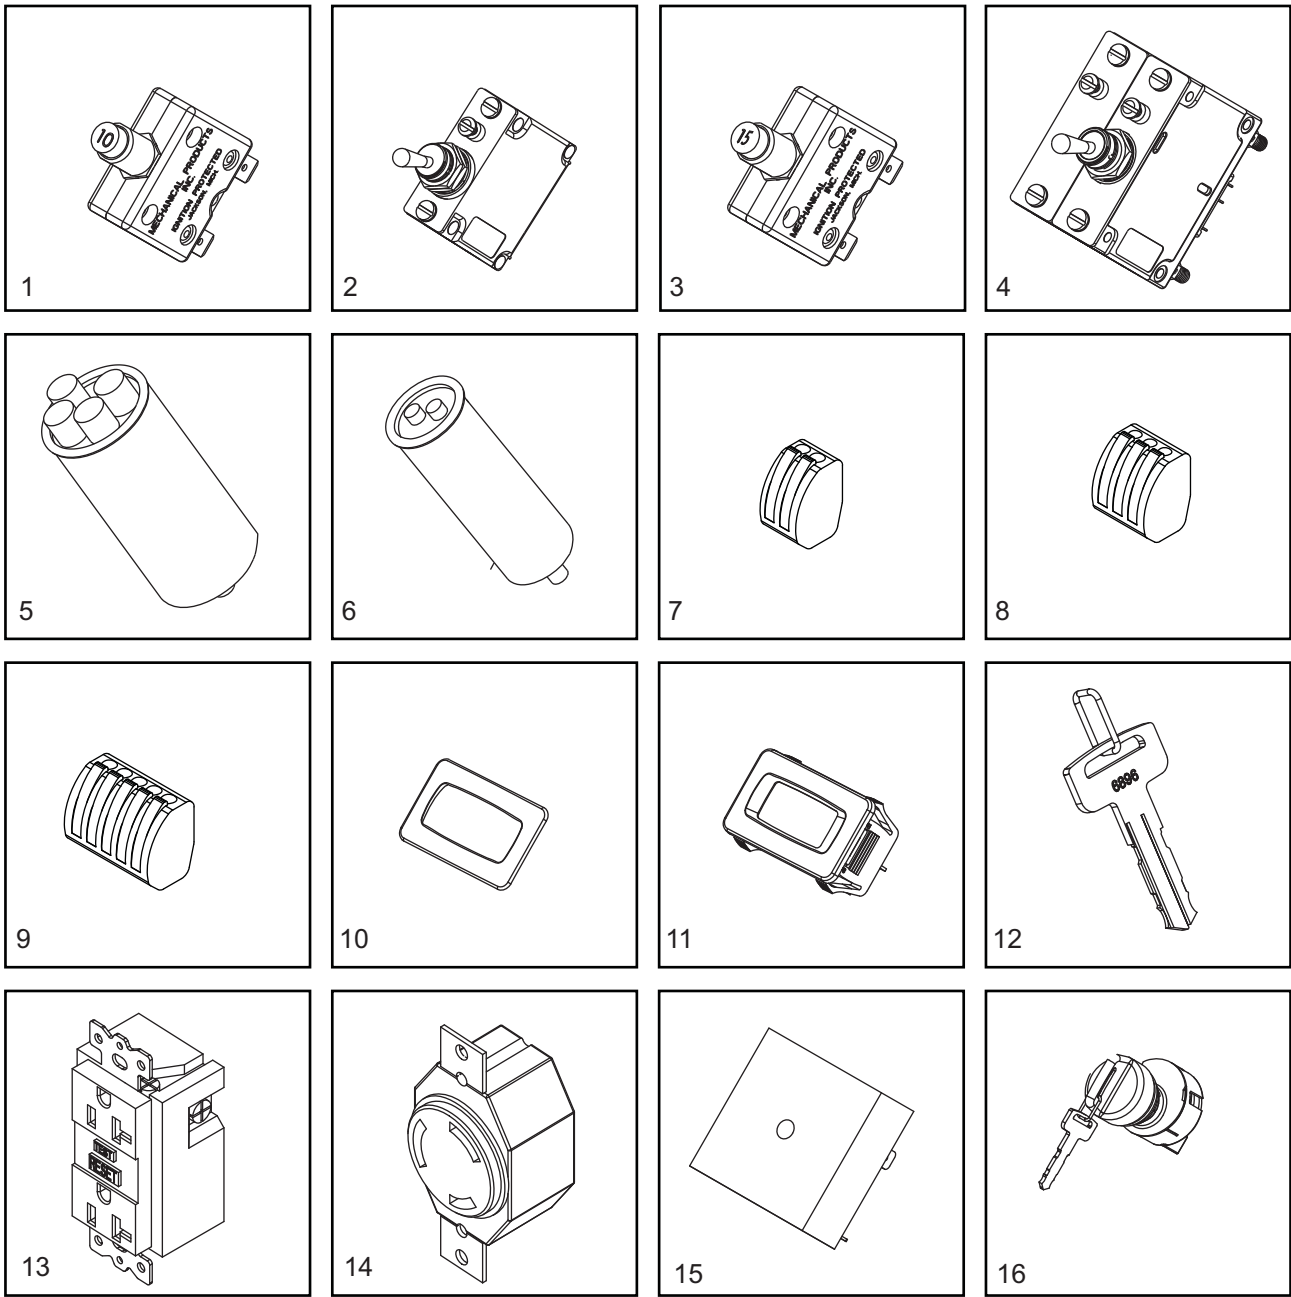


02447

ELECTRICAL

1. Breaker, 10A, 240V, 1 pole, push button	36937
2. Switch, light - 15A	36880
3. Breaker, 15A, 120V, 1 pole, push button, 8kW	36935
4. Breaker, 30A, 250A, 2 pole, 6kW	36975
5. Capacitor, 24 μ F/24 μ F, 5% 540VAC dual	10000024477
6. Capacitor, 25 μ F, 440V, 6kW	36980
7. Connector, 2 position (qty - 4)	66100
8. Connector, 3 position (qty - 2)	66101
9. Connector, 5 position (qty - 1)	66102
10. Gasket, hour meter	36944
11. Gauge, hour meter	36886
12. Key (set of two)	37182
13. Receptacle, 120V/20A GFI	14130
14. Receptacle, 240V/30A twist	14137
15. Relay, 10A SPDT, 15 second time delay	14201
16. Switch, key	36882

RECOMMENDED SPARE PARTS - MISC



ENCLOSURE

1. Gas shock..... 35137

MAST

2. Assembly, light fixture, 1100W MH A0000117617
3. Bulb, 1100W MH..... 10000022381
4. Cable, 79.75 in 31248
5 Cable, 78 in 31277
6. Cable, 144 in 31247
7. Coil cord 39650
8. Assembly, transformer can/base 60Hz MH 5.5 10000029380
9. Winch, manual, includes dual handle 72127

JACKS

10. Jack, top wind, 1200 lb 72126

Part No. 76182 Rev. D 08/19/2020

©2020 Generac Mobile Products, LLC

All rights reserved.

Specifications are subject to change without notice.

No reproduction allowed in any form without prior written consent
from Generac Mobile Products, LLC.

GENERAC | **MOBILE**

Generac Mobile Products, LLC
215 Power Drive, Berlin, WI 54923

GeneracMobileProducts.com | 800-926-9768 | 920-361-4442