

Prime Power Rating

24 kW, 30 kVA, 60 Hz, Three-Phase



Picture shown may not reflect actual configuration.



**Zero Emissions and Zero Sound
Power When and Where You Need It**

The Generac Mobile Battery Energy Storage System (BESS) provides three-phase and single-phase power output for mobile power applications with the advantage of zero sound and zero emissions. When connected to a compatible generator, it creates a hybrid system optimizing generator and BESS operation to power varying load requirements. The BESS automatically turns the generator on to recharge the batteries and provide peak power output and off when not needed, thereby maximizing efficiency.

STANDARD FEATURES

POWER AND VOLTAGE

- 30 kVA Three-Phase Prime Rated Power
- 208/120 V Three-Phase Main Output
- 20/240 V Single-Phase Convenience Receptacles
- 165 A Main Circuit Breaker
- 200 A Inverter Rating Passthrough
- 60 Hz

POWER DISTRIBUTION

- 208/120 V Three-Phase Main Output Camlocks
- (2) 120 V 20 A GFCI Duplex (NEMA 5-20R) Receptacles
- (2) 120/240 V 30 A Twistlock (NEMA L14-30R) Receptacles
- (1) 120 V 30 A Twistlock (NEMA L5-30R) Receptacle

BATTERY TECHNOLOGY

- Deep cycle, Maintenance Free, Dryfit Gel OPzV-S Batteries
- Completely Recyclable
- Durable Tubular Plate Technology

CHARGING CONNECTIONS

- 208/120 V Three-Phase Main Input Camlocks
- 120 V 20 A Single-Phase (NEMA 5-15P) Maintenance Charge Plug
- 50 V 80 A DC Anderson SB175 Connector
- 2-Wire Remote Start Cable for Charging Generator

CONTROL SYSTEM

- Touch Screen HMI
- On/Off Switch
- Battery System Function Indicator Lights
- Emergency Stop
- Telematics Monitoring
- Fail-safe Mode, MBE Goes into bypass and activates generator if a fault occurs.

MOBILITY

- 2-Point Top Lift
- Skid
- Trailer, Dual-axle, Electric Brakes (Optional)

CONNECTIVITY

- 2 Years Included
- 4G Modem with Replaceable SIM Card

WARRANTY

- 2 Years or 750 Battery Cycles (Whichever Occurs First)

APPLICATION AND ENGINEERING DATA

BATTERY ENERGY STORAGE SOLUTION SPECIFICATIONS


	MBE30-90
Prime Power Output	24 kW/30 kVA
Frequency	60 Hz
Main Output Voltage	208/120 V Three-Phase
120 V, 20 A, 1-Phase GFCI Duplex (NEMA 5-20R)	2
120 V, 30 A, 1-Phase Twistlock (NEMA L5-30R)	1
120/240 V, 30 A, 1-Phase Twistlock (L14-30R)	2
Main Circuit Breaker	165 A
Pass-Through Capacity (Inverter Rating)	200 A
Battery Type	Gel Lead Acid OPzV-S
Total Battery Capacity	90 kWh
Usable Battery Capacity	72 kWh
Battery Design Life (Depth of Discharge)	2,000 cycles to 80%, 3,000 cycles to 60%
Operating Temperature	-4 to 113 °F (-20 to 45 °C)
Charging Temperature	-4 to 113 °F (-20 to 45 °C)

OPERATING DATA

POWER RATINGS


	Prime: kW/kVA (A)
Three-Phase, 208/120 VAC @ 0.8 PF	24/30 (83)

DIMENSIONS AND WEIGHTS*

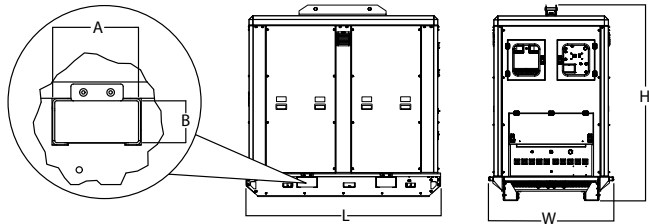

SKID MOUNTED

L x W x H - in (mm)	79.1 x 49.8 x 78.1 (1,983 x 1,265 x 2,010)
A x B - in (mm)	7.9 x 3.9 (200 x 100)
Weight (MBE30-90) - lbs (kg)	8,730 (3,950)

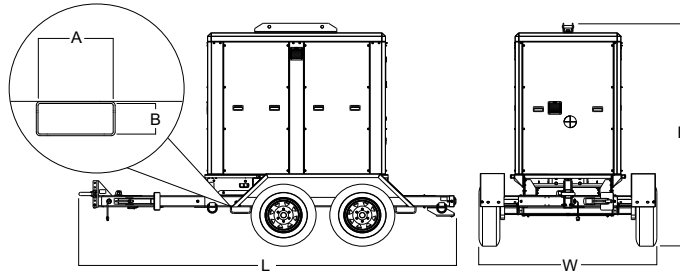

TRAILER MOUNTED

L x W x H - in (mm)	162.9 x 76.8 x 101.0 (4,137 x 1,951 x 2,585)
A x B - in (mm)	8.1 x 2.5 (205 x 95)
Weight (MBE30-90) - lbs (kg)	10,153 (4,615)

SOUND RATING

- Inaudible Above Background

* All measurements are approximate and for estimation purposes only.

YOUR FACTORY RECOGNIZED GENERAC MOBILE DEALER

Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please consult a Generac Mobile Authorized Service Dealer for detailed installation drawings.