

MD500 | 15.2L | 500 kW


INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

GENERAC | INDUSTRIAL
POWER

STANDBY POWER RATING

500 kW, 625 kVA, 60 Hz

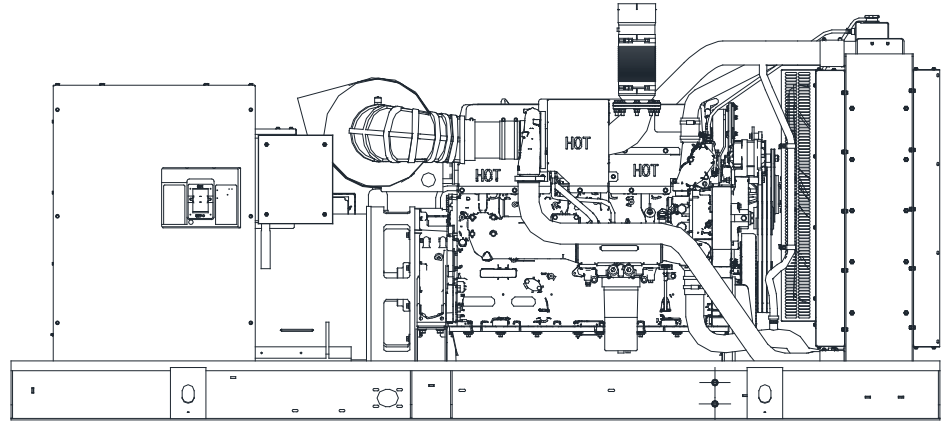

*Built in the USA using domestic and foreign parts

*EPA Certified Prime ratings are not available in the US or its Territories


**Certain options or customization may not hold certification valid

Image used for illustration purposes only


CODES AND STANDARDS

Generac products are designed to the following standards:

 UL2200, UL508, UL142, UL498

 NFPA70, 99, 110, 37

 NEC700, 701, 702, 708

 ISO9001, 8528, 3046, 7637,
Pluses #2b, 4

 NEMA ICS10, MG1, 250, ICS6, AB1



ANSI C62.41

POWERING AHEAD

For over 50 years, Generac has led the industry with innovative design and superior manufacturing.

Generac ensures superior quality by designing and manufacturing most of its generator components, including alternators, enclosures and base tanks, control systems and communications software.

Generac's gensets utilize a wide variety of options, configurations and arrangements, allowing us to meet the Standby power needs of practically every application.

Generac searched globally to ensure the most reliable engines power our generator. We choose only engines that have already been proven in heavy-duty industrial application under adverse conditions.

Generac is committed to ensuring our customer's service support continues after their generator purchase.

STANDARD FEATURES

ENGINE SYSTEM

General

- Oil Drain Extension
- Air Cleaner
- Fan Guard
- Stainless Steel flexible exhaust connection
- Critical Exhaust Silencer (Enclosed Only)
- Factory Filled Oil
- Engine Block Heater

Fuel System

- Flexible Fuel Lines
- Primary and Secondary Fuel Filters

Cooling System

- Closed Coolant Recovery System
- UV/Ozone resistant hoses
- Factory-Installed Radiator
- 50/50 Ethylene glycol antifreeze

Engine Electrical System

- Battery charging alternator
- Battery cables
- Battery tray
- Solenoid activated starter motor
- Rubber-booted engine electrical connections

ALTERNATOR SYSTEM

- Class H insulation material
- 2/3 Pitch
- Skewed Stator
- Permanent Magnet Excitation
- Sealed Bearings
- Amortisseur winding
- Full load capacity alternator

GENERATOR SET

- Internal Genset Vibration Isolation
- Separation of circuits—high/low voltage
- Separation of circuits—multiple breakers
- Wrapped Exhaust Piping (enclosed only)
- Standard Factory Testing
- 2 Year Limited Warranty (Standby rated Units)
- Silencer mounted in the discharge hood (enclosed only)

ENCLOSURE (IF SELECTED)

- Rust-proof fasteners with nylon washers to protect finish
- High performance sound-absorbing material (L1 & L2)
- Gasketed doors
- Stamped air-intake louvers
- Upward pointing radiator discharge hood
- Stainless steel lift off door hinges
- Stainless steel lockable handles
- Rhino Coat™ - Textured polyester powder coat

TANKS (IF SELECTED)

- UL 142
- ULC S-601 Tank
- Double wall
- Vents
- Sloped top
- Sloped bottom
- Factory Pressure Tested (2 psi)
- Rupture basin alarm
- Electric Fuel Level
- Check valve in supply and return lines
- Rhino Coat™ - Textured polyester powder coat tank
- Stainless Steel Hardware

CONTROL SYSTEM

Control Panel

- Digital G-200 Paralleling Control Panel - Touchscreen
- Programmable Crank Limiter
- 7-Day Programmable Exerciser
- Special Applications Programmable PLC
- RS-232/485
- All-Phase Sensing DVR
- Full System Status
- Utility Monitoring
- Low Fuel Level
- 2-Wire Start Compatible
- Power Output (kW)
- Power Factor
- kW Hours, Total & Last Run
- Real/Reactive/Apparent Power
- All Phase AC Voltage
- All Phase Currents
- Oil Pressure

- Coolant Temperature
- Coolant Level
- Engine Speed
- Battery Voltage
- Frequency
- Date/Time Fault History (Event Log)
- Isochronous Governor Control
- Waterproof/sealed Connectors
- Audible Alarms and Shutdowns
- Not in Auto (Flashing Light)
- Auto/O/Manual Switch
- E-Stop (Red Mushroom-Type)
- Customizable Alarms, Warnings, and Events
- Modbus protocol
- Predictive Maintenance algorithm
- Sealed Boards
- Password parameter adjustment protection
- Single point ground
- 15 channel data logging
- 0.2 msec high speed data logging
- Alarm information automatically comes up on the display

Alarms

- Oil Pressure (Pre-programmable Low Pressure Shutdown)
- Coolant Temperature (Pre-programmed High Temp Shutdown)
- Coolant Level (Pre-programmed Low Level Shutdown)
- Low Fuel Alarm
- Engine Speed (Pre-programmed Over speed Shutdown)
- Battery Voltage Warning
- Alarms & warnings time and date stamped
- Alarms & warnings for transient and steady state conditions
- Snap shots of key operation parameters during alarms & warnings
- Alarms and warnings spelled out (no alarm codes)

PARALLELING CONTROLS

- Auto-synchronization process
- Isochronous load sharing
- Reverse power protection
- Maximum power protection
- Electrically operated, mechanically held paralleling switch
- Sync check system
- Independent on-board paralleling
- Optional programmable logic full auto back-up control (pls)
- Shunt Trip and Auxiliary Contact

CONFIGURABLE OPTIONS

ENGINE SYSTEM

General

- 50° C Ambient Cooling System
- Heavy Duty Air Cleaner
- Critical & Hospital Grade Silencers
- CCV (Closed Crankcase Ventilation)

Fuel Electrical System

- 10A & 20A UL battery charger
- Battery Warmer

ALTERNATOR SYSTEM

- Alternator Upsizing
- Anti-Condensation Heater

CIRCUIT BREAKER OPTIONS

- Main Line Circuit Breaker
- 2nd Main Line Circuit Breaker
- Shunt Trip and Auxiliary Contact
- Electronic Trip Breaker

GENERATOR SET

- Intelimonitor Communications Software (English Only)
- 8 Load Position Load Center
- AC Electrical Lighting Package (ELP)
- 5 Year Warranty
- 5 Year Extended Warranty
- Spring Isolators (Standard/Seismic)

ENCLOSURE

- Weather Protected Enclosure
- Level 1 Sound Attenuation
- Level 2 Sound Attenuation
- Steel Enclosure
- Aluminum Enclosure
- 150/180 MPH Wind Rating
- Louvers with Gravity Dampers
- Enclosure Heaters

TANKS (Size on last page)

- Electrical Fuel Level
- Mechanical Fuel Level
- 12 Hour Run Time
- 24 Hour Run Time
- Fuel Line Kits
- Fuel Water Separator

CONTROL SYSTEM

- NFPA 110 Complaint
- Remote Relay Board (8 or 16)
- Oil Temperature Sender with Indication Alarm
- Remote E-Stop (Break Glass-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Surface Mount)
- Remote E-Stop (Red Mushroom-Type, Flush Mount)
- Remote Communication - Bridge
- Remote Communication - Ethernet
- 10A Run Relay, 12 outputs
- Ground Fault Indication and Protection Functions

ENGINEERED OPTIONS

ENGINE SYSTEM

- Fluid containment Pans
- Oil Heater
- Stainless Steel Hardware

ALTERNATOR SYSTEM

- 3rd Breaker Systems
- Unit Mounted Load Banks
- Medium Voltage Alternators

CONTROL SYSTEM

- Spare inputs (x4) / outputs (x4)
- Battery Disconnect Switch

GENERATOR SET

- Special Testing
- 12 VDC Enclosure Lighting Kit
- 24 VDC/120 VAC Enclosure Lighting Kit

ENCLOSURE

- Motorized Dampers
- Intrusion Alert Door Switch

TANKS

- Overfill Protection Valve
- UL2085 Tank
- ULC S-601 Tank
- Stainless Steel Tank
- Special Fuel Tanks (MIDEQ and FL DEP/DERM, etc.)
- Vent Extensions
- Transfer Pumps and Controllers
- Fuel Tank Heaters

RATING DEFINITIONS

Standby - Applicable for a varying emergency load for the duration of a utility power outage with no overload capability.

Prime - Applicable for supplying power to a varying load in lieu of utility for an unlimited amount of running time. A 10% overload capacity is available for 1 out of every 12 hours. The Prime Power option is only available on International applications. Power ratings in accordance with ISO 8528-1, Second Edition

MD500 | 15.2L | 500 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

APPLICATION AND ENGINEERING DATA

ENGINE SPECIFICATIONS

General

Make	Perkins
EPA Emissions Compliance	Stationary Emergency
EPA Emissions Reference	See Emissions Data Sheet
Cylinder #	6
Type	In-Line
Displacement - L (cu In)	15.2
Bore - mm (in)	137 (5.39)
Stroke - mm (in)	171 (6.73)
Compression Ratio	16.0:1
Intake Air Method	Turbocharged/Intercooled
Cylinder Head Type	4 - Valve
Piston Type	Aluminum
Crankshaft Type	I-Beam Section

Engine Governing

Governor	Electronic Isochronous
Frequency Regulation (Steady State)	+/- 0.25%

Lubrication System

Oil Pump Type	Gear
Oil Filter Type	Full-Flow Cartridge
Crankcase Capacity - L (qts)	38 (40.15)

Cooling System

Cooling System Type	Closed Recovery
Water Pump	Centrifugal Type, Belt Driven
Fan Type	Pusher
Fan Speed (rpm)	1658
Fan Diameter mm (in)	927 (36.5)
JW Coolant Heater Standard Wattage	
After Coolant Heater Standard Wattage	1500
Coolant Heater Standard Voltage	240VAC

Fuel System

Fuel Type	Ultra Low Sulfur Diesel #2
Fuel Specifications	ASTM
Fuel Filtering (microns)	Primary 10 - Secondary 2
Fuel Injection	Electronic
Fuel Pump Type	Engine Driven Gear
Injector Type	MEUI
Engine Type	Pre-Combustion
Fuel Supply Line mm (in)	12.7 (½"NPT)
Fuel Return Line mm (in)	12.7 (½"NPT)

Engine Electrical System

System Voltage	24 VDC
Battery Charging Alternator	70 Amps at 24V
Battery Size	1155 CCA
Battery Group	8D
Battery Voltage	(2) - 12 VDC
Ground Polarity	Negative

ALTERNATOR SPECIFICATIONS

Standard Model	WEG
Poles	4
Field Type	Revolving
Insulation Class - Rotor	H
Insulation Class - Stator	H
Total Harmonic Distortion	<3%
Telephone Interference Factor (TIF)	<50

Standard Excitation	Permanent Magnet
Bearings	Single Sealed Cartridge
Coupling	Direct, Flexible Disc
Load Capacity - Standby	100%
Prototype Short Circuit Test	Yes
Voltage Regulator Type	Digital
Regulation Accuracy (Steady State)	±0.5%

MD500 | 15.2L | 500 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

OPERATING DATA

POWER RATINGS

		Standby
Three-Phase 120/208 VAC @0.8pf	500 kW	Amps: 1735
Three-Phase 120/240 VAC @0.8pf	500 kW	Amps: 1504
Three-Phase 277/480 VAC @0.8pf	500 kW	Amps: 752
Three-Phase 346/600 VAC @0.8pf	500 kW	Amps: 601

STARTING CAPABILITIES (sKVA)

sKVA vs. Voltage Dip

Alternator	kW	480 VAC						208/240 VAC							
		10%	15%	20%	25%	30%	35%	10%	15%	20%	25%	30%	35%		
Standard	500	475	686	914	1143	1371	1600	Standard	500	429	643	857	1071	1286	1500
Upsize 1	642	471	707	943	1179	1414	1650	Upsize 1	689	543	814	1086	1357	1629	1900
Upsize 2	832	757	1136	1514	1893	2271	2650	Upsize 2	723	571	857	1143	1429	1714	2000

FUEL CONSUMPTION RATES*

Fuel Pump Lift - ft (m)	Diesel - gal/hr (l/hr)	
	Percent Load	Standby
12 (3.7)	25%	10.5 (39.7)
Total Fuel Pump Flow (Combustion + Return) gal/hr (l/hr)	50%	19.5 (73.8)
	75%	23.7 (89.7)
	100%	31.2 (118.1)

* Fuel supply installation must accommodate fuel consumption rates at 100% load.

COOLING

		Standby
Coolant Flow per Minute	gal/min (l/min)	114.1 (432)
Coolant System Capacity	gal (L)	13 (49)
Heat Rejection to Coolant	BTU/hr	1,198,080
Inlet Air	cfm (m ³ /hr)	30,582 (866)
Max. Operating Radiator Air Temp	F° (C°)	122 (50)
Max. Ambient Temperature (before derate)	F° (C°)	104 (40)
Maximum Radiator Backpressure	in H ₂ O	0.5

COMBUSTION AIR REQUIREMENTS

		Standby
Flow at Rated Power	cfm (m ³ /min)	1483 (42)

ENGINE

		Standby
Rated Engine Speed	rpm	1800
Horsepower at Rated kW**	hp	762
Piston Speed	ft/min (m/min)	2020
BMEP	psi	366

EXHAUST

		Standby
Exhaust Flow (Rated Output)	cfm (m ³ /min)	3955 (112)
Max. Backpressure (Post Silencer)	inHg (Kpa)	2.01 (6.8)
Exhaust Temp (Rated Output)	°F (°C)	1022 (550)
Exhaust Outlet Size (Open Set)	mm (in)	127 (5)

** Refer to "Emissions Data Sheet" for maximum bHP for EPA and SCAQMD permitting purposes.

Deration – Operational characteristics consider maximum ambient conditions. Derate factors may apply under atypical site conditions. Please consult a Generac Power Systems Industrial Dealer for additional details. All performance ratings in accordance with ISO3046, BS5514, ISO8528 and DIN6271 standards.

MD500 | 15.2L | 500 kW

INDUSTRIAL DIESEL GENERATOR SET

EPA Certified Stationary Emergency

DIMENSIONS AND WEIGHTS*

OPEN SET

RUN TIME HOURS	USABLE CAPACITY GAL (L)	L x W x H in (mm)	WT lbs (kg) - Tank & Open Set	
NO TANK	-	154.4 (3923) x 71 (1803) x 67 (1702)	10580 (4799)	
10	334	158.5 (4026) x 71 (1803) x 81 (2057)	12255 (5559)	
32	1001	158.5 (4026) x 71 (1803) x 103 (2616)	13180 (6978)	
32	1001	228 (5791) x 71 (1803) x 92 (2337)	13730 (6228)	
64	2002	290 (7366) x 71 (1803) x 103 (2616)	15430 (6999)	

STANDARD ENCLOSURE

RUN TIME HOURS	USABLE CAPACITY GAL (L)	L x W x H in (mm)	WT lbs (kg) - Enclosure Only	
			Steel	Aluminum
NO TANK	-	207.4 (5268) x 71 (1803) x 80 (2032)		
10	334	207.4 (5268) x 71 (1803) x 94 (2388)	1999 (907)	869 (394)
32	1001	207.4 (5268) x 71 (1803) x 116 (2946)		
32	1001	228 (5791) x 71 (1803) x 105 (2667)		
64	2002	290 (7366) x 71 (1803) x 116 (2946)		


LEVEL 1 ACOUSTIC ENCLOSURE

RUN TIME HOURS	USABLE CAPACITY GAL (L)	L x W x H in (mm)	WT lbs (kg) - Enclosure Only	
			Steel	Aluminum
NO TANK	-	247.5 (6285) x 71 (1803) x 80 (2032)		
10	334	247.5 (6285) x 71 (1803) x 94 (2388)	2782 (1262)	1291 (586)
32	1001	247.5 (6285) x 71 (1803) x 116 (2946)		
32	1001	247.5 (6285) x 71 (1803) x 105 (2667)		
64	2002	290 (7366) x 71 (1803) x 116 (2946)		

LEVEL 2 ACOUSTIC ENCLOSURE

RUN TIME HOURS	USABLE CAPACITY GAL (L)	L x W x H in (mm)	WT lbs (kg) - Enclosure Only	
			Steel	Aluminum
NO TANK	-	207.4 (5268) x 71 (1803) x 114 (2899)		
10	334	207.4 (5268) x 71 (1803) x 128 (3251)	3330 (1510)	1522 (692)
32	1001	207.4 (5268) x 71 (1803) x 150 (3810)		
32	1001	228 (5791) x 71 (1803) x 139 (3531)		
64	2002	290 (7366) x 71 (1803) x 150 (3810)		

* All measurements are approximate and for estimation purposes only. Sound dBA can be found on the sound data sheet. Enclosure Only weight is added to Tank & Open Set weight to determine total weight.

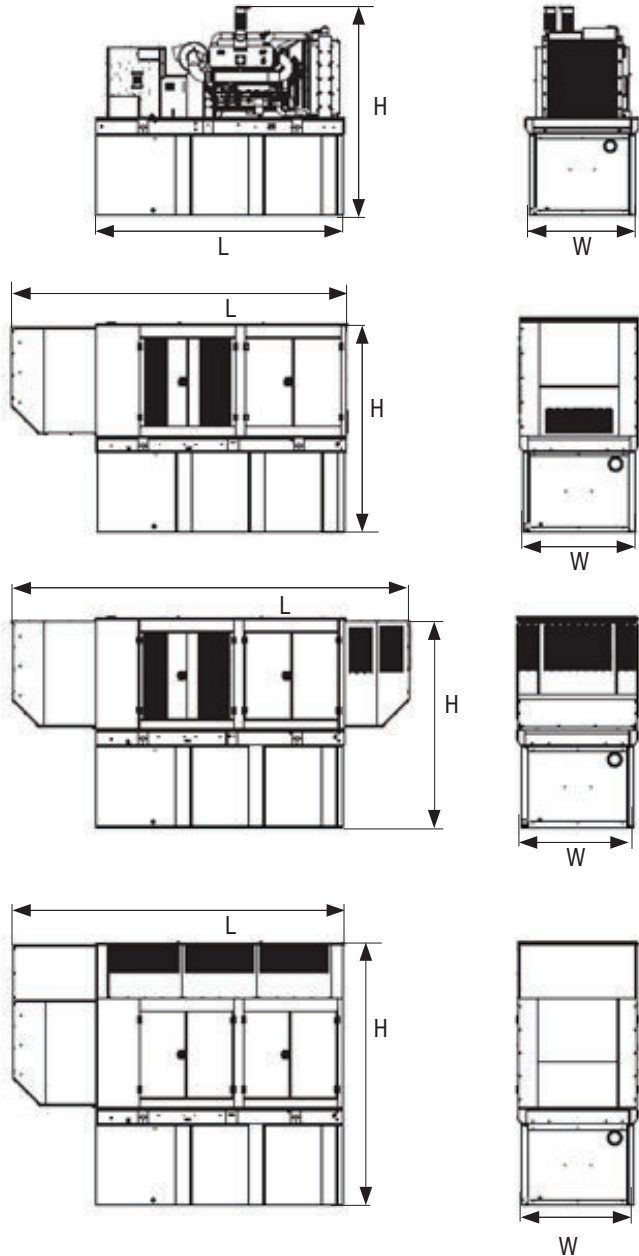

Specification characteristics may change without notice. Dimensions and weights are for preliminary purposes only. Please consult a Generac Power Systems Industrial Dealer for detailed installation drawings.